




# RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

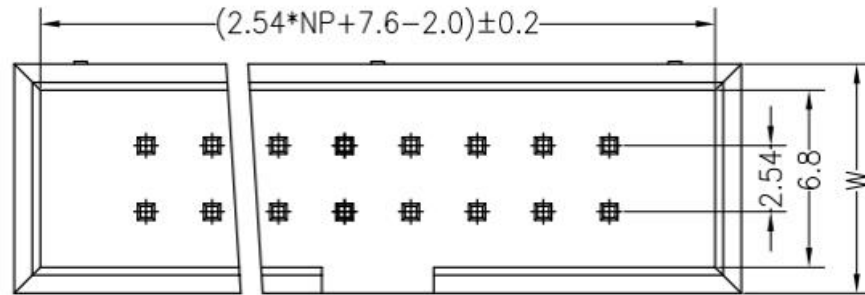

### Specifications


- 1.Current Rating:3.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40°C to+105°C
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

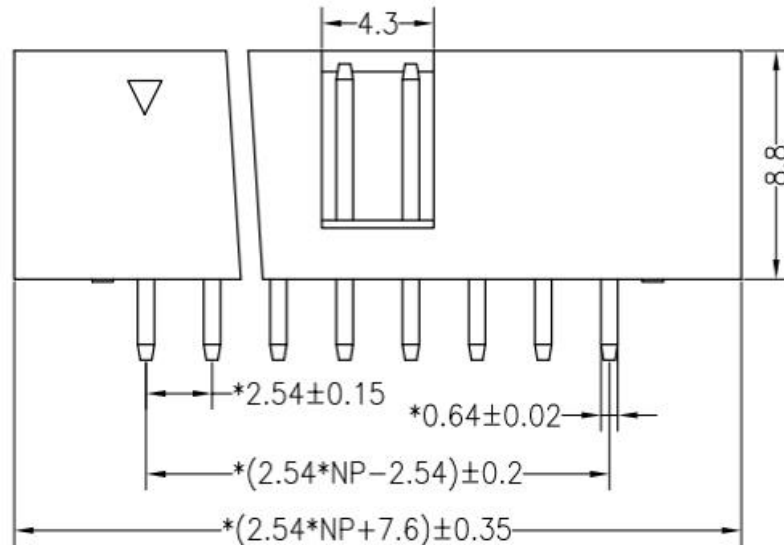

### Ordering Information

Insulation Height*Wide (H*W) 9.0*8.8	Per Row: Insulation Material Option: 10P 26P 30P 40P 44P	1=Gold 2=Silver 3=Copper 4=Black 5=White 6=Red 7=Blue 8=Green 9=Yellow	Contact Plating 0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin	Serial NO. 01-69	A. 袋装
					B. 管装
					C. 盘装
					D. 卷装

ITEM	PC	H	Pin Length
Standard	3.00	9.00	11.40
Alternate			

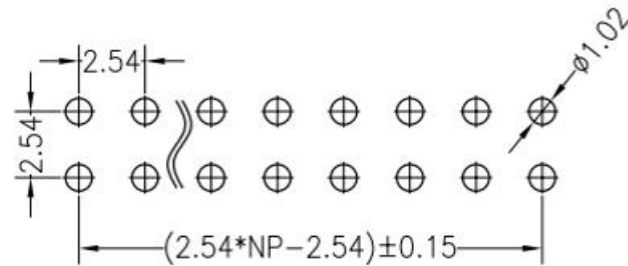

**PCB LAYOUT**

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER	ANGLES		
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

## 广东科斯达开关厂

TITLE	PH2.54mm Pin Header Dual Row 180°	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4