

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		





Specifications

- 1.Current Rating:3.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage:1000V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40°C to+105°C
- 6.Contact Material: Brass
- 7.Insulation Material:As follows,UL94V-0,Black
- 8.Plated: Au Over Ni

Ordering Information

Insulation Height*Wide (H*W) Option: 25=2.54*7.5	NO. of Pins Per Row: 1-50P	Insulation Material Option: 1=PBT 2=PPS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T	Contact Plating 0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin	Serial NO. 01-69	Packing A=PE Bag B=Tube C=Tray D=Reel
--------------------------------------------------------	-------------------------------	-------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------	---------------------	---------------------------------------------------

ITEM	PC	PB	PA	H	Pin Length
Standard	3.00	9.20	4.00	2.54	11.8/16.8/21.8
Alternate					

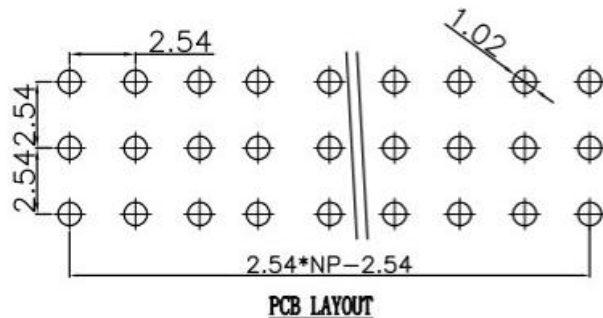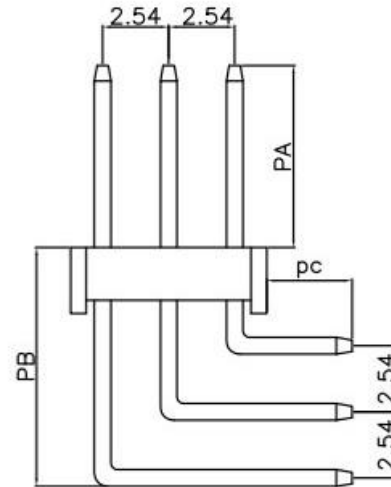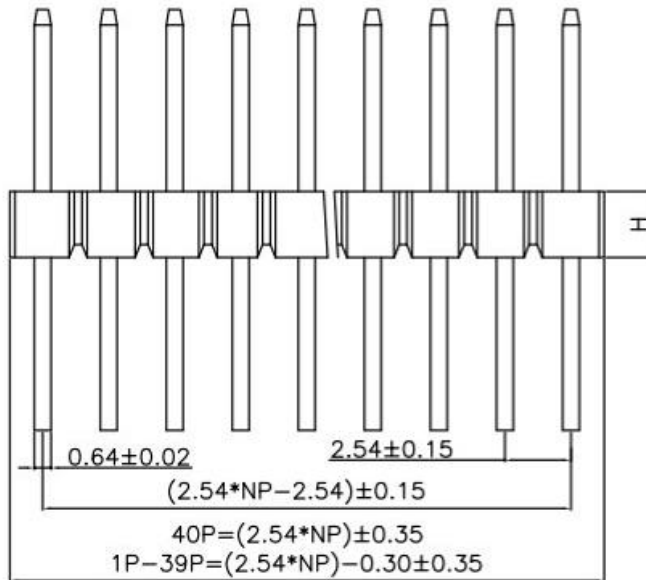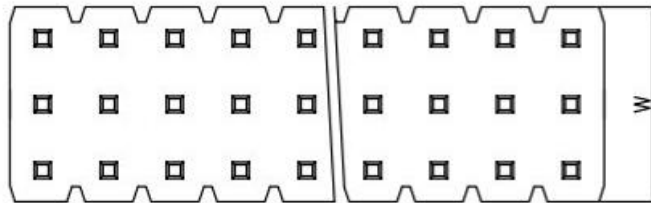

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0	±0.30
.00	±0.20
.000	±0.10
0.°	±3°
.0°	±2°
.00°	±1°

广东科斯达电子科技有限公司

TITLE	PH2.54mm Pin Header Three lines 90°	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4