

# RoHS

REV	REV NO	DESCRIPTION	DATE	NAME
A		REV		

## Materials

Pin (outer sleeve) :Brass,machined, CuZn38Pb2  
 Clip(contact 4 finger) :Beryllium copper,heat treated

Plating(outer sleeve) :

Tin plated : 2u<sup>m</sup>/80u<sup>m</sup>nickel,5um/200u<sup>m</sup>Tin  
 Gold plated: 2u<sup>m</sup>/80u<sup>m</sup>nickel,full gold

Plating clip(contact):

2um/80 u<sup>m</sup>nickel,gold or tin plating



Insulator body(black) : Glass filled thermoplastic polyester UL94V-0 electrical

Current rating : 3 Amps/contact max.

Contact resistance : 10m Ω /contact

Insulation resistance : 1000M at V=100V

Operating voltage : 60 AC/DC

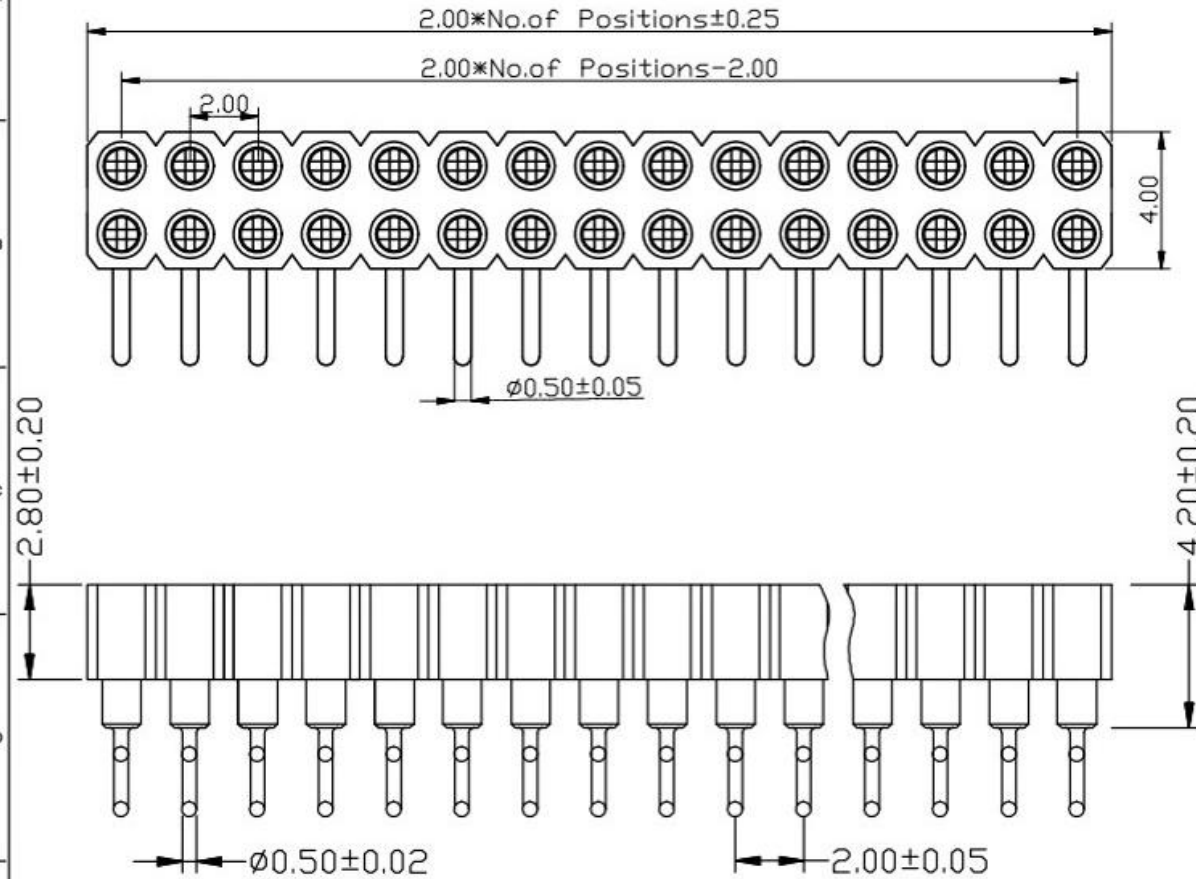

## Ordering Information

L488XX - X X XX X

NO. of Pins  
 Per Row:  
 01-40P

The connection  
 method  
 0=180°  
 1=90°  
 2=SMT

Contact  
 Plating  
 1=Gold flash  
 2=Au/Tin  
 3=Tin

Serial NO.  
 01-99

Packing  
 A=PE Bag  
 B=Tube  
 C=Tray  
 D=Reel

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

## 广东科斯达电子科技有限公司

TITLE	FIG. No-1 Modified Pinhole Number P-4.0 Match per 90° Type	DRAWN BY	Lujunhui	12.11.12
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4