

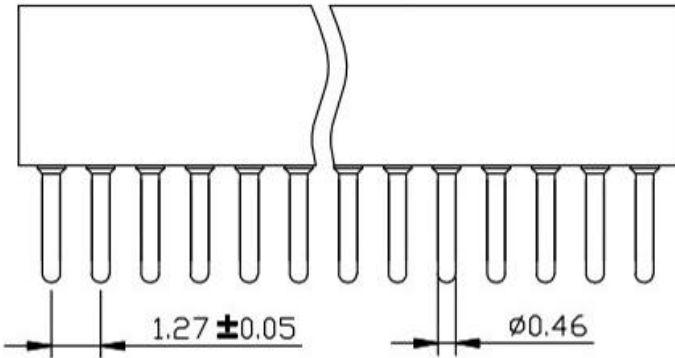


# RoHS


REV	DCN NO	DESCRIPTION	DATE	NAME
A		REV		

### Technical Specs:

Insulator: Black glass filled polyester PCT-GF30-FR  
 Flammability: UL 94V-0  
 Sleeve: Brass(H59-3)  
 Contact clip(3 finger):Beryllium copper(C17300)  
 Accepted pin:  $\varnothing 0.38$  to  $0.50\text{mm}$   
 Forces: (polished steel gauge  $\varnothing 0.41\text{mm}$ )  
 -Insertion 0.5N Typ  
 -Withdrawal 0.2N Typ  
 Mechanical life: min500 cycles  
 Rated current: 1A  
 Contact resistance: max 20m $\Omega$   
 Dielectric resistance: min 500V RMS

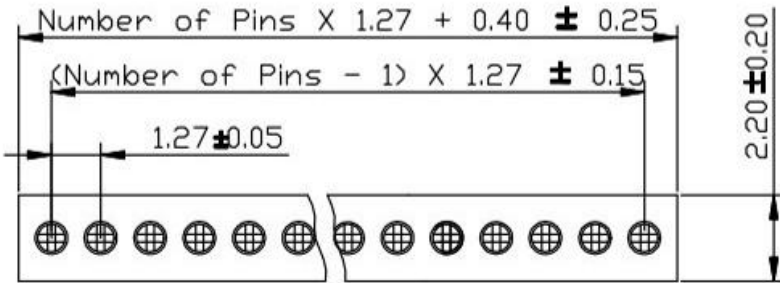

## Ordering Information

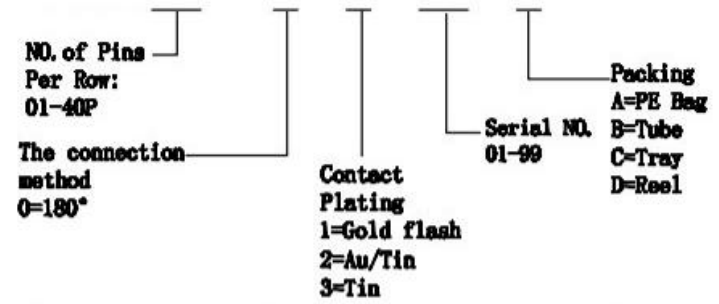

## 广东科斯达电子科技有限公司

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	PL. Size: Standard Profile Number P-4.1 Single and Straight Type	DRAWN BY	Lujunhui	12.11.10
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	
PAGE	1/1	SIZE	A4	