



RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	12/30-'20	ZW

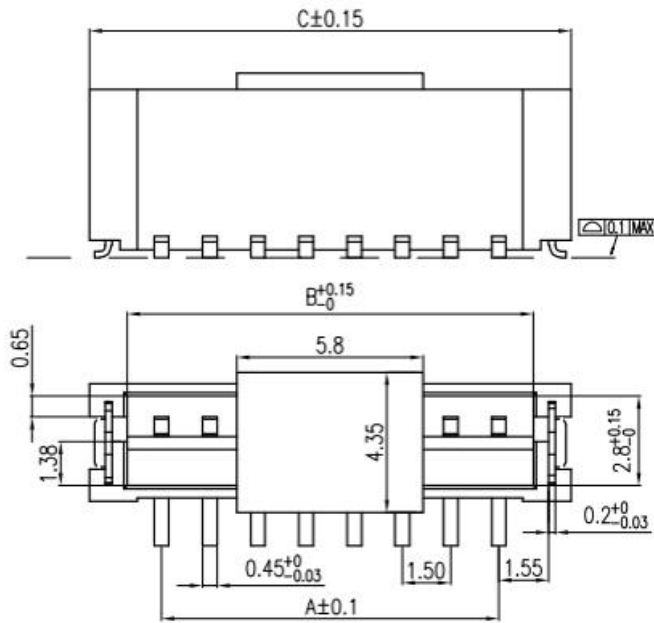

截面 A-A

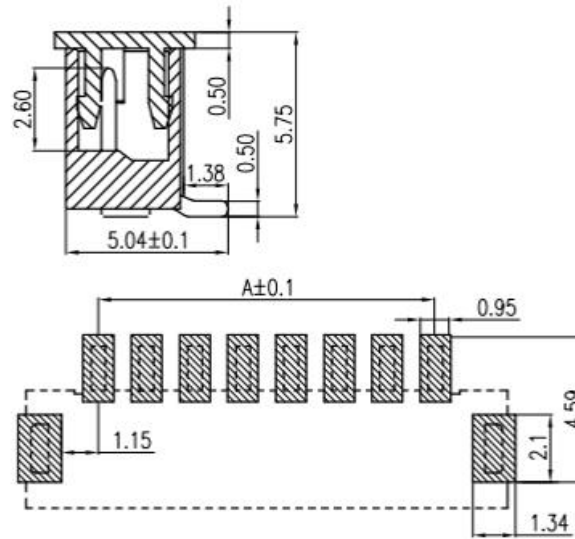


Specifications

- 1.Current Rating: 1Amps
- 2.rated voltage: 125V AC/DC
- 3.Insulation Resistance: 500 MΩ Min.
- 4.Dielectric withstanding Voltage: 500V AC
- 5.Contact Resistance: 20 mΩ Max.
- 6.Operating Temperature: -25°C to+85°C
- 7.Contact : Phosphor Bronze,Plating Sn
- 8.Positioning pin:Phosphor Bronze,Plating Sn
- 9.Insulation Material: LCP(E130I),UL94V-0
- 10.Cap: LCP(E130I),UL94V-0
- 11.Marked "*" symbol are major dimensions.

Ordering Information

NO.of Pins Per Row:	Insulation Height	Insulator Material	Contact Plating	Serial NO.	Packing
01-99P	44=4.4mm	1:PBT 2:LCP 3:NY46 4:NY66 5:NY6T 6:NY9T	G;G/F 1: Au1u" 2: Au3u" 3: Au5u" 4: Au10u" 5: Au15u" 6: Au30u" 7:Gold/TIn 8: TIn 9: Customized	01-99	A=PE Bag B=Tube C=Tray D=Reel

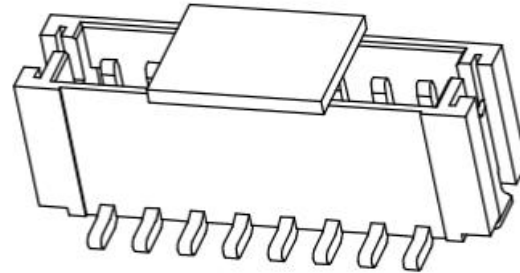

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
2P	1.5	3.66	6.02	12P	16.5	18.66	21.02
3P	3.0	5.16	7.52	13P	18.0	20.16	22.52
4P	4.5	6.66	9.02	14P	19.5	21.66	24.02
5P	6.0	8.16	10.52	15P	21.0	23.16	25.52
6P	7.5	9.66	12.02	16P	22.5	24.66	27.02
7P	9.0	11.16	13.52	17P	24.0	26.16	28.52
8P	10.5	12.66	15.02	18P	25.5	27.66	30.02
9P	12.0	14.16	16.52	19P	27.0	29.16	31.52
10P	13.5	15.66	18.02	20P	28.5	30.66	33.02
11P	15.0	17.16	19.52				


STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

广东科斯达开关厂


TITLE	WF-LQ PH1.5 1XNP 立贴带 帽 贝吉色	DRAWN BY	ZW	12/30-'20
PART NO.		CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	12/30-'20	ZW

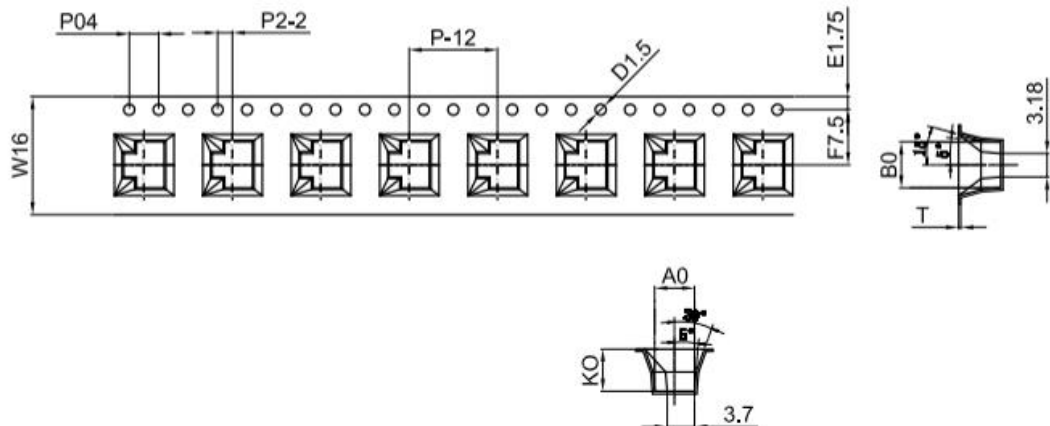

卷装示意图仅供参考

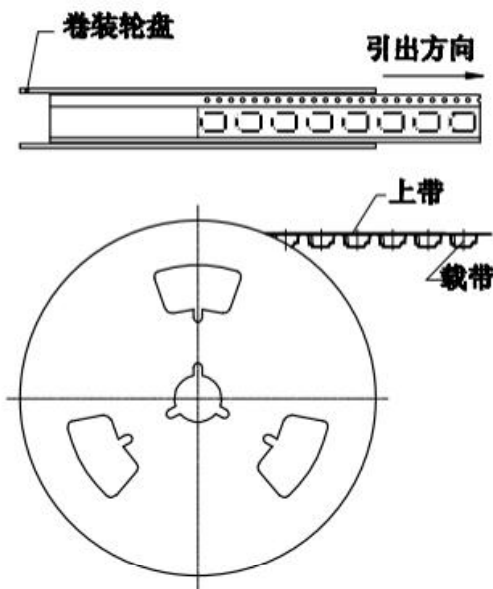


尺寸栏

E	1.75±0.10
F	7.5±0.10
P2	2.00±0.10
∅D	1.50± 0.10 0.00
Po	4.00±0.10
W	16.00±0.30
P	12.0±0.10
Ao	5.40±0.10
Bo	6.25±0.10
KO	5.75±0.10
t	0.35±0.05

A-A
说明

1. 10个边孔的紧计公差不能超过±0.2mm
2. 材料规格;PS 白色料抗静电, 厚度 0.35mm
3. 13英寸卷轮卷装长度;12.576米, 包装零件总颗数;1048颗, 每盘实包颗数;1000颗
4. 所有尺寸设计参照EIA-481-C-2003.
5. 载带在250mm长度内最大弯曲不能超过1mm
见上图



STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

广东科斯达开关厂

TITLE	WF-LQ PH1.5 1XNP 立贴带帽包规图	DRAWN BY	ZW	12/30-'20
PART NO.		CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4