


# RoHS



REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

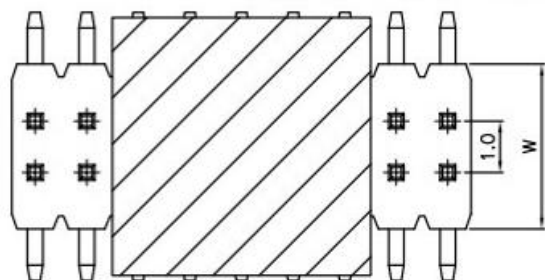

## Specifications


- 1.Current Rating:0.75Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:30 mΩ max.
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

## Ordering Information

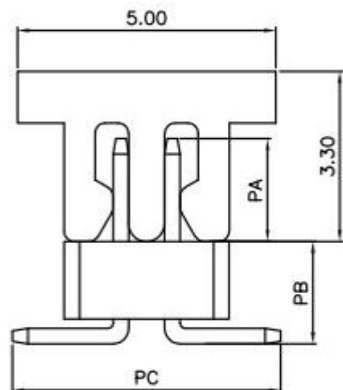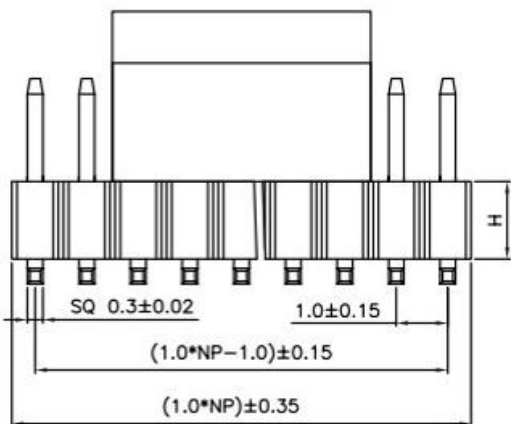

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO. 01-69	Packing
10=1.0*3.0		1=PBT	0=0.8" Gold		A=PE Bag
15=1.5*2.3		2=PPS	1=Au1" Gold		B=Tube
15=1.5*3.2		3=NY6T	2=Au1.5" Gold		C=Tray
		4=LCP	3=Au2" Gold		D=Reel
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

Dimension antitheses list					
ITEM	PC	PB	PA	H	Pin Length
Standard	5.20	2.00	2.00	1.50	5.8
Alternate					

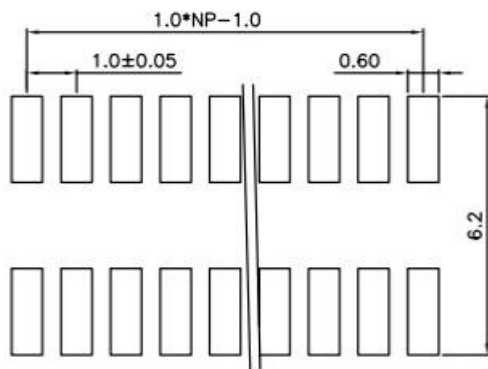

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0	±0.30 0.° ±3°
.00	±0.20 .0° ±2°
.000	±0.10 .00° ±1°

# 广东科斯达开关厂

TITLE	PH1.0mm Pin Header Dual Row SMT	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNITE	mm	PAGE 1/1
				SIZE A4