RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

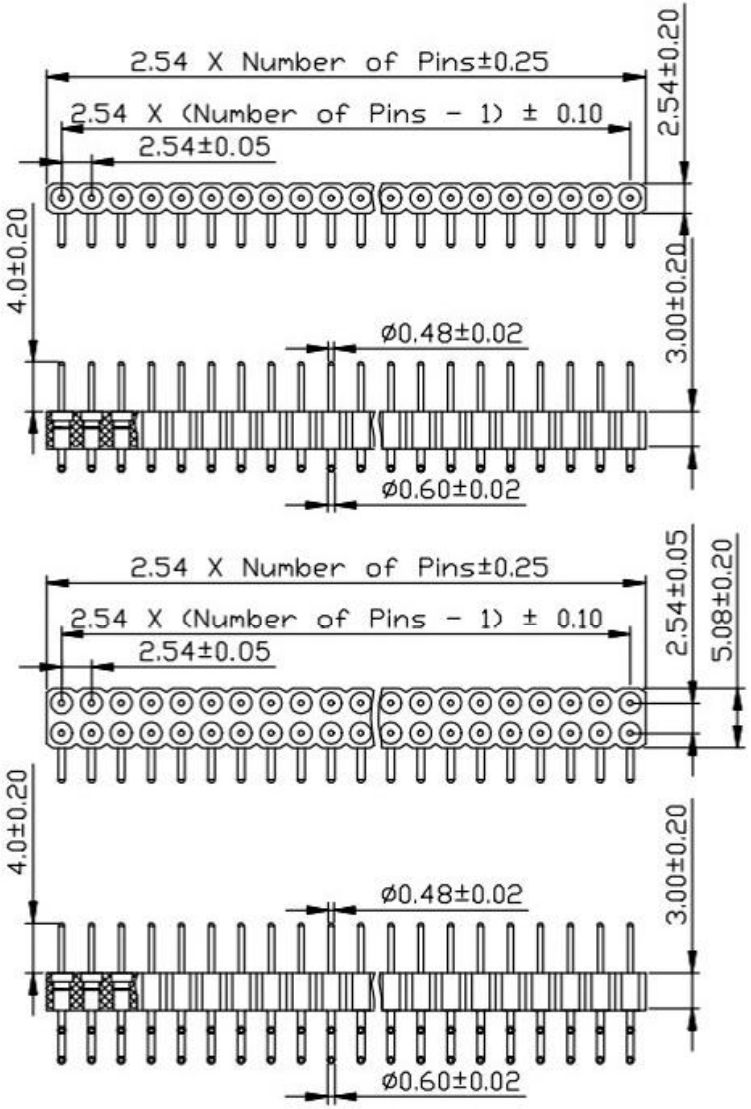



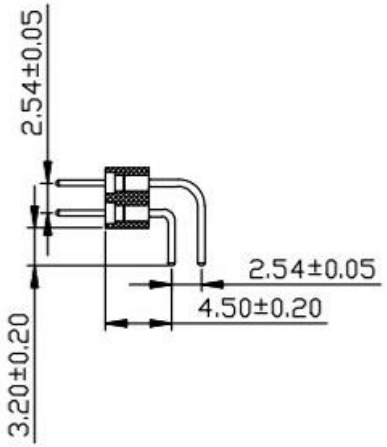

Materials:

Pin :Brass,machined, (H59-3)
Plating:
Tin plated :2u"m/80u"nickel,5um/200u"Tin
Gold plated:2u"m/80u"nickel,full gold
Insulator body(black):Glass filled polyester Valox UL94V-0

Electrical:

Current rating:3 Ampe/contact max.
Insulation resistance:"R1000M at V=100V
Operating voltage:60 AC/DC

Mechanical:

Operating temperature :Gold plated:-55 ℃ to +125 ℃
(Continuous) -67 ℉ to +257 ℉
Tin plated:-40 ℃ to +105 ℃
Soldering temperature:260 ℃,10s max

Ordering Information

- NO. of Pins Per Row: 01-40P
- The connection method: 0=180° 1=90° 2=SMT
- Contact Plating: 1=Gold flash 2=Au/Tin
- Serial NO. 01-99
- Packing: A=PE Bag B=Tube C=Tray D=Reel

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

广东科斯达电子科技有限公司

TITLE	PH2.54mm-L Machined Male Header H=3.0 Single row/Double row 90° Type			DRAWN BY	Lujunhui	18.11.12	
PART NO				CHECKED BY			
DRAWING NO				APPROVED BY			
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE	A4