

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Specifications

- 1.Current Rating:3.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

Ordering Information




Insulation Height*Wide (H*W)	Per Row:	Insulation Material	Contact Plating	Serial NO.	A、袋装
9.0*8.8	10P	Option:	0=0.8" Gold	01-69	B、管装
	26P	1=PBT	1=Au1" Gold		C、盘装
	30P	2=PPS	2=Au1.5" Gold		D、卷装
	40P	3=NY6T	3=Au2" Gold		
	44P	4=LCP	4=Au3" Gold		
		5=NY66	5=Au5" Gold		
		6=Customized	6=Customized		
		7=NY46	7=Gold/Tin		
		8=NY9T	8=Tin		

Dimension antitheses list				
ITEM	PC	PB	H	Pin Length
Standard	3.00	13.50	9.00	15.2/20.2
Alternate				

广东科斯达开关厂

TITLE	PH2.54mm Pin Header Dual Row 90°	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER	ANGLES		
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

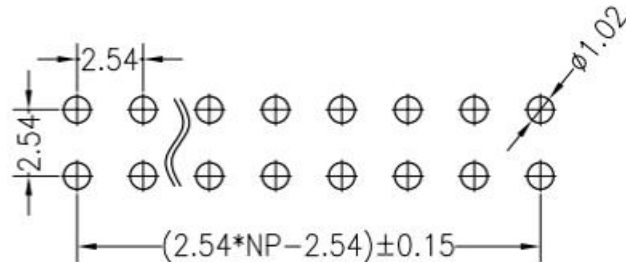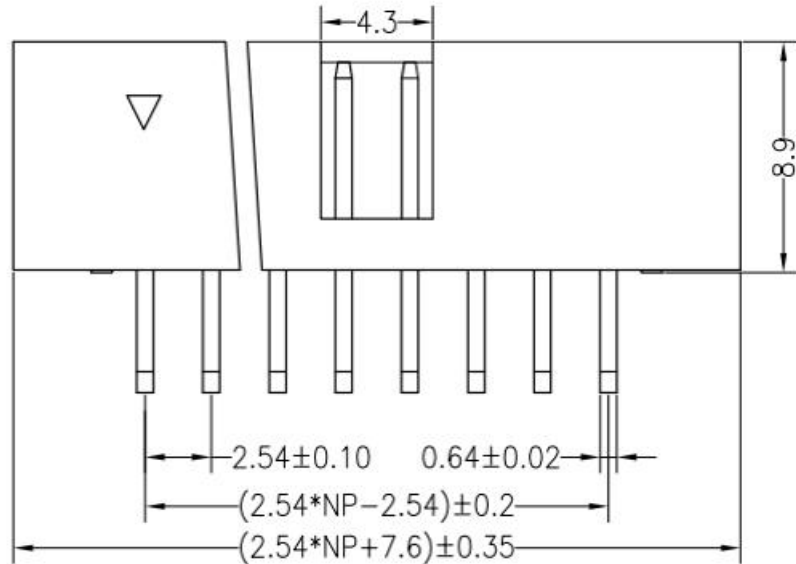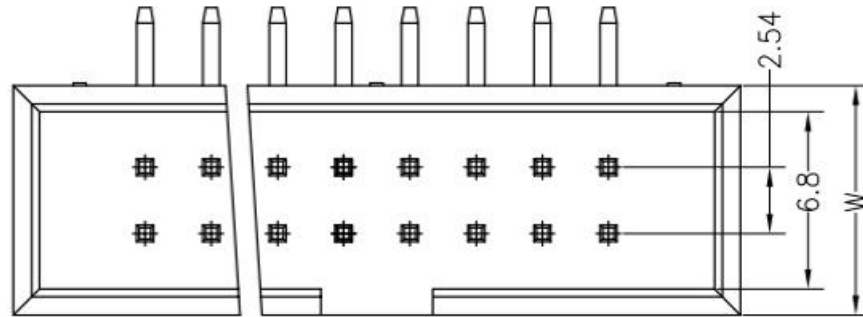

PCB LAYOUT