

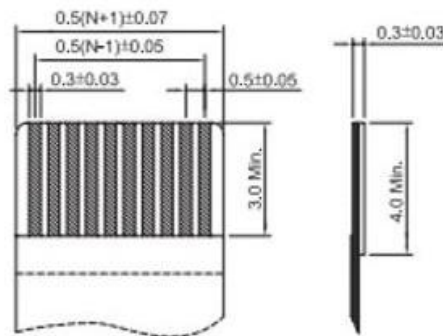
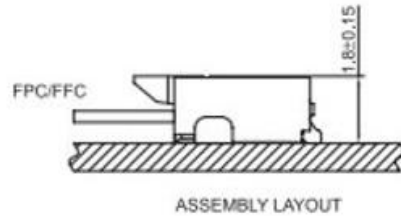
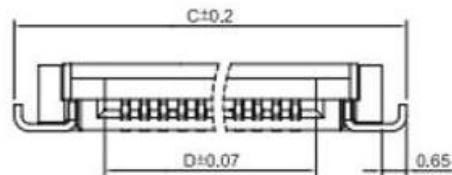



REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		FIRST VERSION	2/23' 21

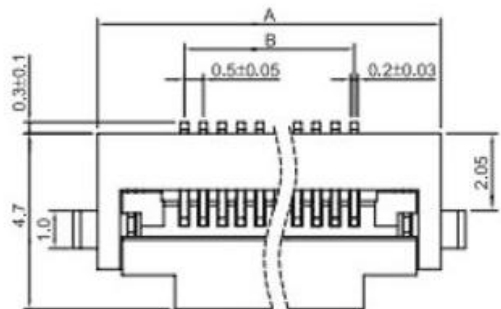

Applicable Flat Cable 2

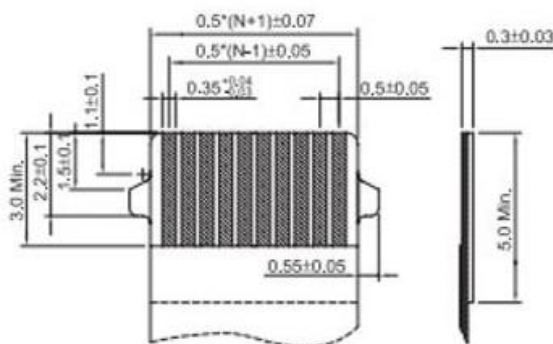

Applicable Flat Cable 1

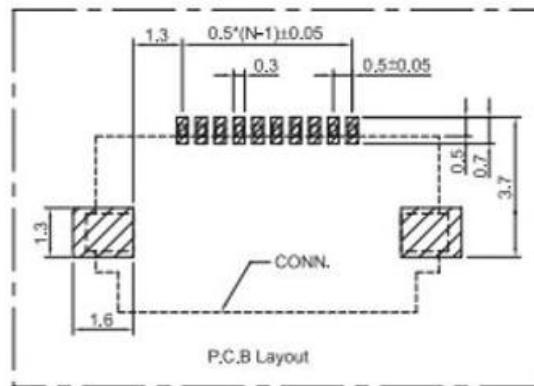

P.C.B Layout

CKT	尺寸 Size(mm)			
	A	B	C	D
4	6.1	1.5	7.4	2.6
6	7.1	2.5	8.4	3.6
8	8.1	3.5	9.4	4.6
10	9.1	4.5	10.4	5.6
16	12.1	7.5	13.4	8.6
20	14.1	9.5	15.4	10.6
24	16.1	11.5	17.4	12.6
30	19.1	14.5	20.4	15.6
40	24.1	19.5	25.4	20.6
50	29.1	24.5	30.4	25.6
60	34.1	29.5	35.4	30.6
80	44.1	39.5	45.4	40.6

### 技术参数 Main Specifications

极数 CKT: 4 ~ 80

工作温度 Working Temperature: -25°C ~ +85°C

额定电压 Voltage rating(max): 50V, AC/DC

接触电阻 Contact resistance: ≤ 30mΩ

绝缘电阻 Insulation resistance: ≥ 100MΩ

额定电流 Current rating: 0.5A

耐电压 Withstand voltage: 500VAC(rms)

### 材料 Material

接触端子 Terminal: 铜合金 Copper alloy

塑胶本体 Housing: UL 94V-0 LCP

GENERAL TOLERANCE		DRAWN	Wilson Sun	02/23'21	SCALE	PART NO.
X.±0.30	x.±3.0'	CHECKED	SHENGJIE CHU	02/23'21	1/1	TITLE
.X±0.25	.x±2.0'	APPROVED	CUNFA LAI	02/23'21	UNITS	mm
.XX±0.20		File NO.			CUSTOMER DRAWING	
.XXX±0.10		REV.				
SHEET	1/3	Q'TY	1	A		

广东科斯达开关厂