

# 技术参数 Main Specifications

极数 CKT: 4 ~ 60

工作温度 Working Temperature:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

额定电压 Voltage rating(max): 50V, AC/DC

接触电阻 Contact resistance:  $\leq 0.03\Omega$

绝缘电阻 Insulation resistance:  $\geq 500\text{M}\Omega$

额定电流 Current rating: 0.5A




耐电压 Withstand voltage: 500VAC(rms)

## 材料 Material



接触端子 Terminal: 铜合金 Copper alloy

塑胶本体 Housing: UL 94V-0 LCP


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		FIRST VERSION	2/23' 21

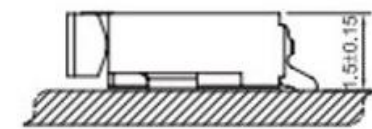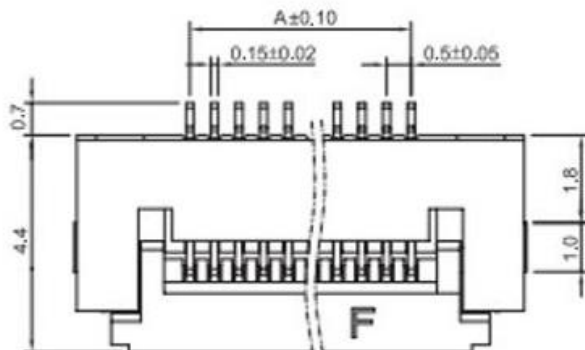

ASSEMBLY LAYOUT

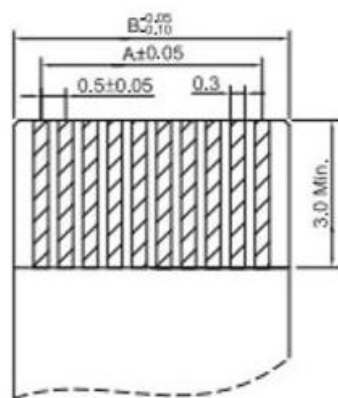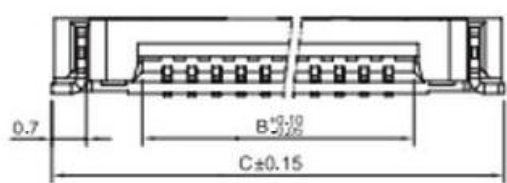

Applicable Flat Cable

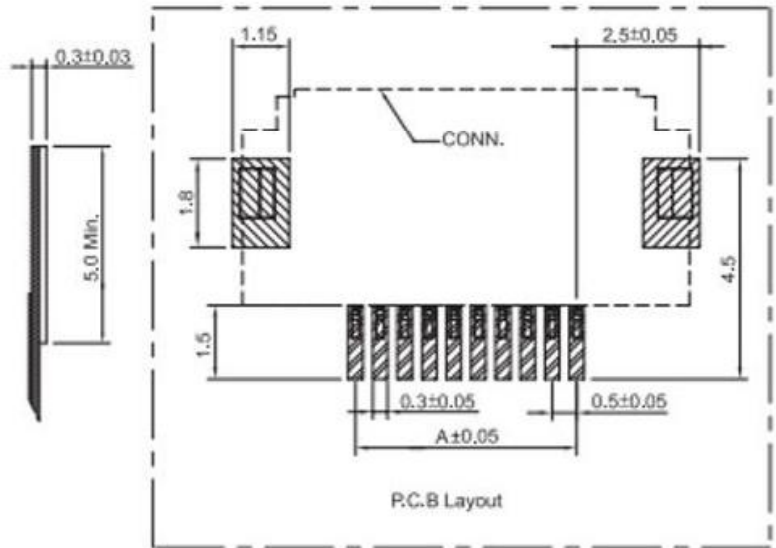

P.C.B Layout

CKT	尺寸 Size(mm)		
	A	B	C
4	1.50	2.53	6.20
6	2.50	3.53	7.20
8	3.50	4.53	8.20
10	4.50	5.53	9.20
12	5.50	6.53	10.20
20	9.50	10.53	14.20
24	11.50	12.53	16.20
25	12.00	13.03	16.70
26	12.50	13.53	17.20
30	14.50	15.53	19.20
40	19.50	20.53	24.20
50	24.50	25.53	29.20
51	25.00	26.03	29.70
53	26.00	27.03	30.70
55	27.00	28.03	31.70
57	28.00	29.03	32.70
60	29.50	30.53	34.20

GENERAL TOLERANCE		DRAWN	Wilson Sun	02/23'21	SCALE	1/1	PART NO.	
X.±0.30	x.*±3.0'	CHECKED	SHENGJIE CHU	02/23'21	TITLE	0.5 Pitch B=1.5 Auto-Lock FPC		
.X±0.25	.x'±2.0'	APPROVED	CUNFA LAI	02/23'21	UNITS	mm	CUSTOMER DRAWING	
.XX±0.20		File NO.						
.XXX±0.10		REV.						
SHEET	1/3	QTY	1	A				

广东科斯达开关厂

此文件为双方检验的唯一标准  
This document is the only standard for inspection by both parties.