
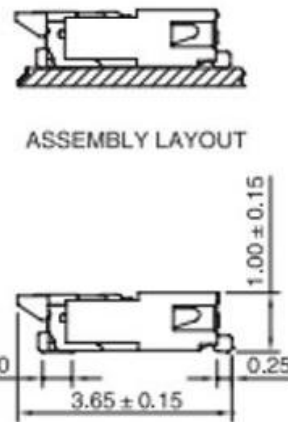
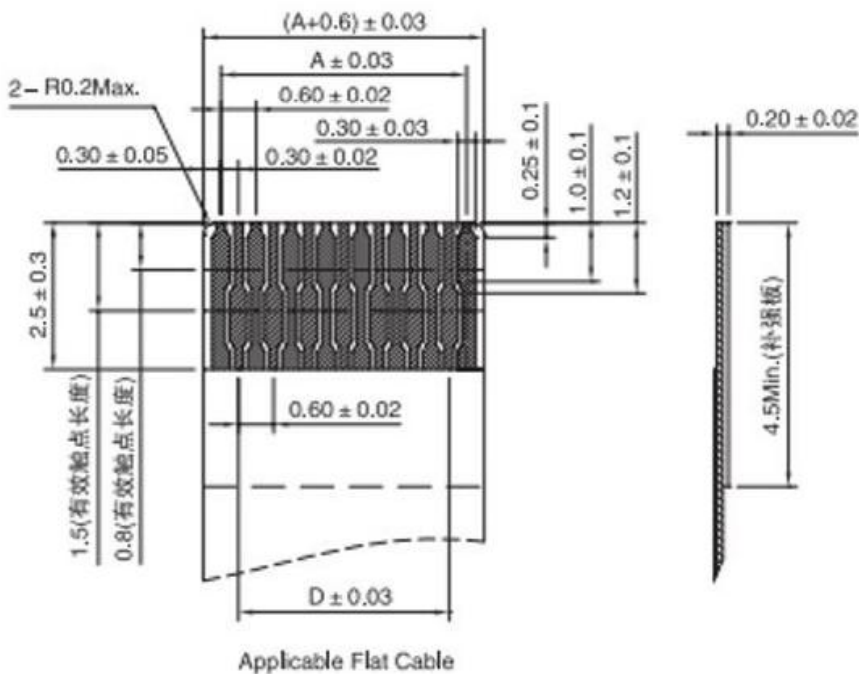
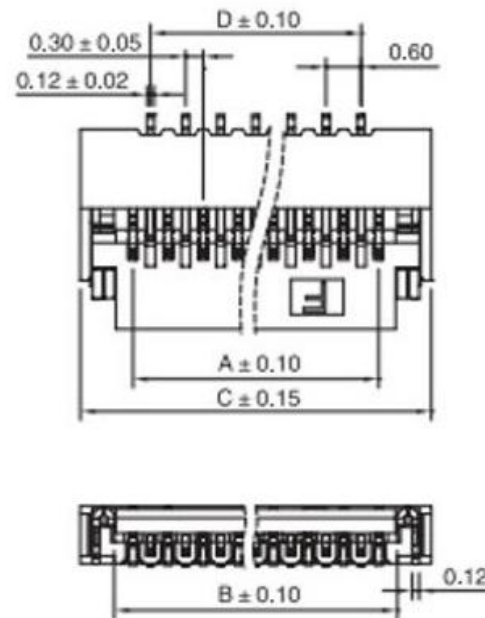


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		FIRST VERSION	2/23' 21

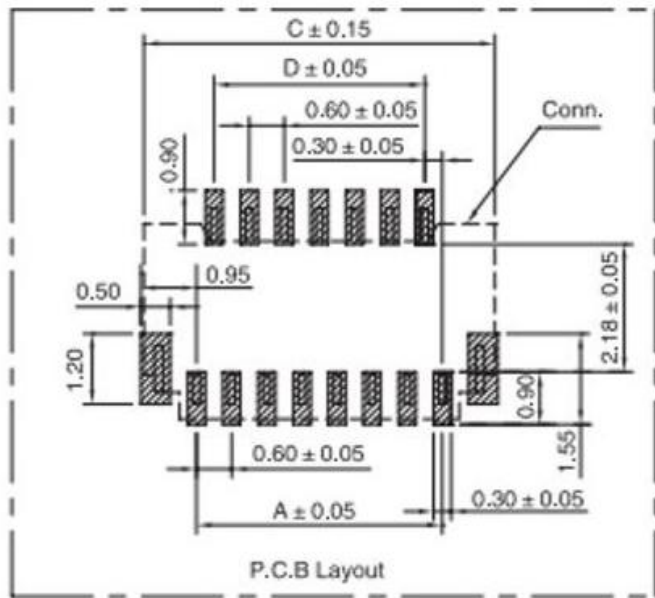

技术参数 Main Specifications

极数 CKT: 11 ~ 71
 工作温度 Working Temperature: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 额定电压 Voltage rating(max): 30V, AC
 接触电阻 Contact resistance: $\leq 40\text{m}\Omega$
 绝缘电阻 Insulation resistance: $\geq 50\text{M}\Omega(\text{DC500V})$
 额定电流 Current rating: 0.2A
 耐电压 Withstand voltage: 500VAC(rms)

材 料 Material

接触端子 Terminal: 铜合金 Copper alloy
 塑胶本体 Housing: UL 94V-0 LCP

CKT	尺寸 Size(mm)			
	A	B	C	D
13	3.60	4.24	5.40	3.00
15	4.20	4.84	6.00	3.60
17	4.80	5.44	6.60	4.20
21	6.00	6.64	7.80	5.40
25	7.20	7.84	9.00	6.60
29	8.40	9.04	10.20	7.80
33	9.60	10.24	11.40	9.00
35	10.20	10.84	12.00	9.60
39	11.40	12.04	13.20	10.80
41	12.00	12.64	13.80	11.40
57	16.80	17.44	18.60	16.20
65	19.20	19.84	21.00	18.60
71	21.00	21.64	22.80	20.40

GENERAL TOLERANCE		DRAWN	Wilson Sun	02/23'21	SCALE	1/1	PART NO.	
$X \pm 0.30$	$x' \pm 3.0'$	CHECKED	SHENGJIE CHU	02/23'21	TITLE	0.5 Pitch H=1.5 Auto-Lock FPC		
$.X \pm 0.25$	$.x' \pm 2.0'$	APPROVED	CUNFA LAI	02/23'21	UNITS	mm	CUSTOMER DRAWING	
$.XX \pm 0.20$		File NO.						
$.XXX \pm 0.10$		REV.						
SHEET	1/3	QTY	1	A				

广东科斯达开关厂