
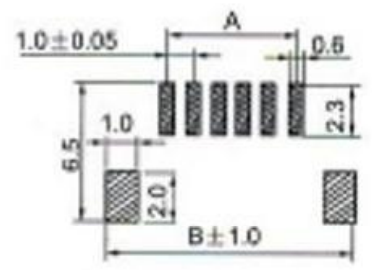



REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		FIRST VERSION	2/23' 21


1.0-A-nPWB

1.0mm间距双面接卧式贴片(带焊片)



孔位 Poles	A	B	C
4	3.0	7.5	5.1
5	4.0	8.5	6.1
6	5.0	9.5	7.1
7	6.0	10.5	8.1
8	7.0	11.5	9.1
9	8.0	12.5	10.1
10	9.0	13.5	11.1
11	10.0	14.5	12.1
12	11.0	15.5	13.1
13	12.0	16.5	14.1
14	13.0	17.5	15.1
15	14.0	18.5	16.1
16	15.0	19.5	17.1
17	16.0	20.5	18.1
18	17.0	21.5	19.1
19	18.0	22.5	20.1
20	19.0	23.5	21.1
21	20.0	24.5	22.1
22	21.0	25.5	23.1
23	22.0	26.5	24.1
24	23.0	27.5	25.1
25	24.0	28.5	26.1
26	25.0	29.5	27.1
27	26.0	30.5	28.1
28	27.0	31.5	29.1
29	28.0	32.5	30.1
30	29.0	33.5	31.1
31	30.0	34.5	32.1
32	31.0	35.5	33.1
33	32.0	36.5	34.1
34	33.0	37.5	35.1
35	34.0	38.5	36.1
36	35.0	39.5	37.1
37	36.0	40.5	38.1
38	37.0	41.5	39.1
39	38.0	42.5	40.1
40	39.0	43.5	41.1

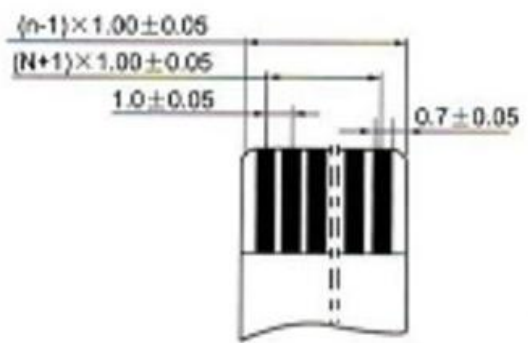


印制线路板
PCB P.C.B Layout

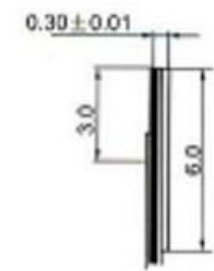


适用扁平电缆
Proper cable

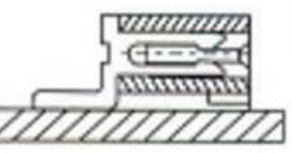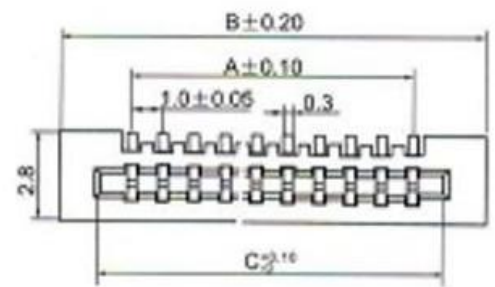

安装图
ASSEMBLY LAYOUT

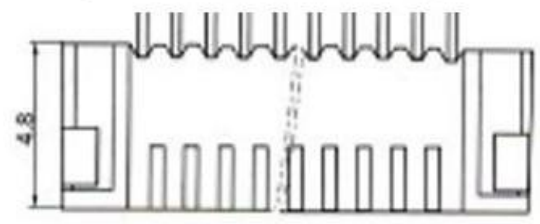

PART NO. Remark

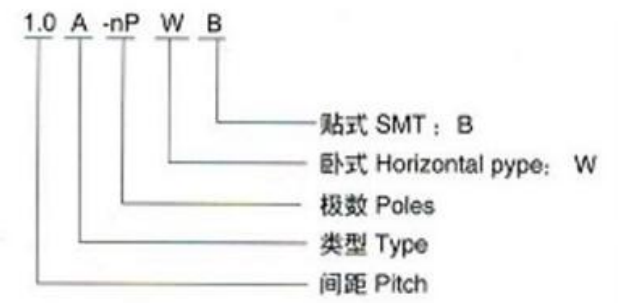

包装方式 PACKAGE

管装 Pipe Package
盒装 Box Package

技术参数 SPECIFICATIONS

极数 Poles: 4~40
 额定电压 Voltage rating(max): 50V DC/AC(rms)
 额定电流 Current rating: 0.5A, AC, DC
 工作温度 Working Temperature: -25°C~+85°C
 耐压值 Withstand voltage: 500VAC(rms)
 绝缘电阻 Insulation resistance: ≥800MΩ
 接触电阻 Contact resistance: ≤0.02Ω
 双面接触 Dual Contact

材料 MATERIAL

塑件(材质) Plastic (Material): 尼龙 Nylon46, UL94V-0
 端子(材质): 磷青铜, 镀锡
 Terminal(Material): phosphor Bronze, Tin plating

GENERAL TOLERANCE		DRAWN	Wilson Sun	02/23'21	SCALE	PART NO.
X±0.30	x'±3.0'	CHECKED	SHENGJIE CHU	02/23'21	1/1	TITLE
.X±0.25	.x'±2.0'	APPROVED	CUNFA LAI	02/23'21	UNITS	mm
.XX±0.20		File NO.			CUSTOMER DRAWING	
.XXX±0.10		REV.				
SHEET	1/3	QTY	1	A		

广东科斯达开关厂

此文件为双方检验的唯一标准
This document is the only standard for inspection by both parties.