

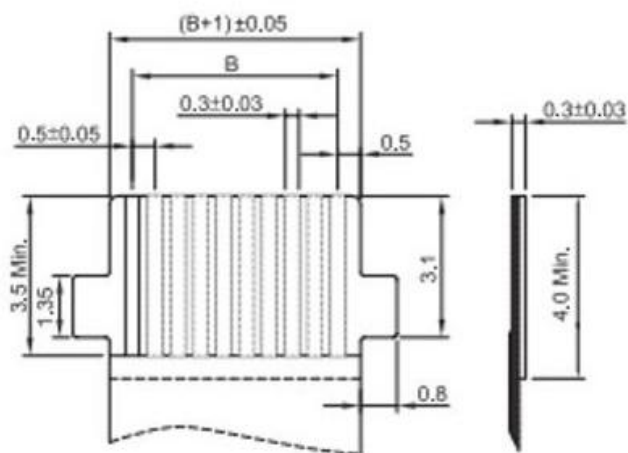
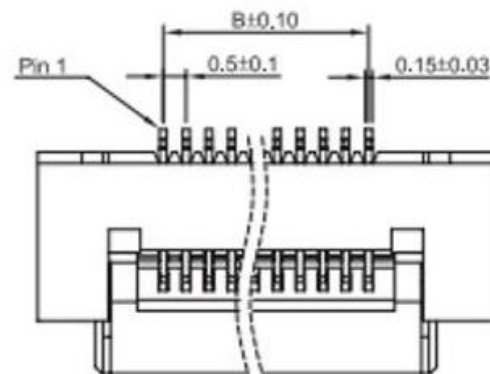
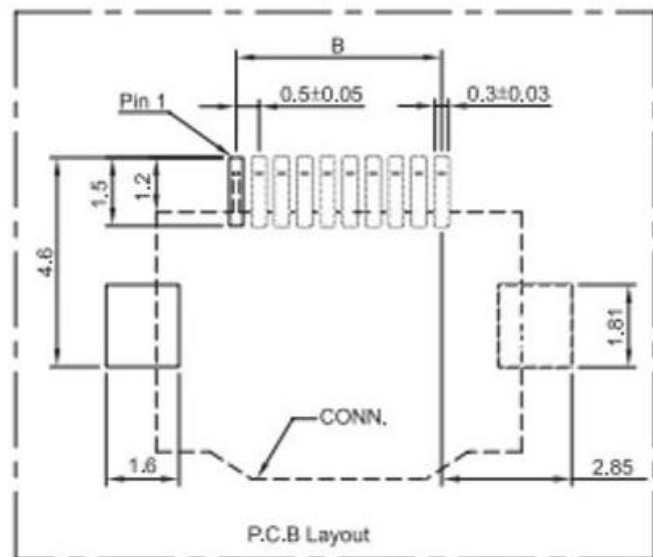
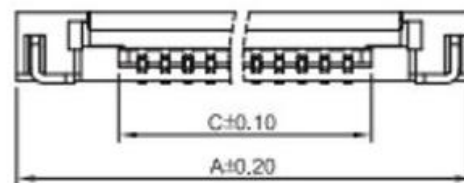


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		FIRST VERSION	2/23'21



Applicable Flat Cable

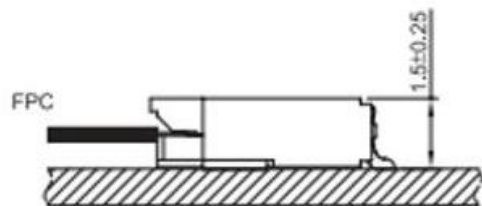

技术参数 Main Specifications

极数 CKT: 4~60
 工作温度 Working Temperature: -25℃ ~ +85℃
 额定电压 Voltage rating(max): 50V, AC/DC
 接触电阻 Contact resistance: ≤ 30mΩ
 绝缘电阻 Insulation resistance: ≥ 100MΩ
 额定电流 Current rating: 0.5A
 耐电压 Withstand voltage: 500VAC(rms)

材 料 Material

接触端子 Terminal: 铜合金 Copper alloy
 塑胶本体 Housing: UL 94V-0 LCP

CKT	尺寸 Size(mm)		
	A	B	C
4	7.00	1.50	2.54
6	8.00	2.50	3.54
10	10.00	4.50	5.54
16	13.00	7.50	8.54
18	14.00	8.50	9.54
20	15.00	9.50	10.54
24	17.00	11.50	12.54
30	20.00	14.50	15.54
40	25.00	19.50	20.54
50	30.00	24.50	25.54
60	35.00	29.50	30.54

GENERAL TOLERANCE		DRAWN	Wilson Sun	02/23'21	SCALE	1/1	PART NO.	
X.±0.30	x.'±3.0'	CHECKED	SHENGJIE CHU	02/23'21	UNITS	mm	TITLE	0.5 Pitch B=1.5 Auto-Lock FPC
.X±0.25	.x'±2.0'	APPROVED	CUNFA LAI	02/23'21	 CUSTOMER DRAWING			
.XX±0.20		File NO.						
.XXX±0.10		REV.						
SHEET	1/3	Q'TY	1	A	广东科斯达开关厂			