




REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		THE FIRST VERSION	03/07'18
B		Add normal force	12/16'20

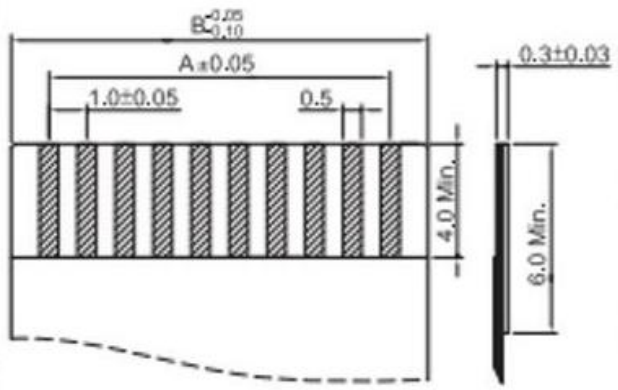


Applicable Flat Cable

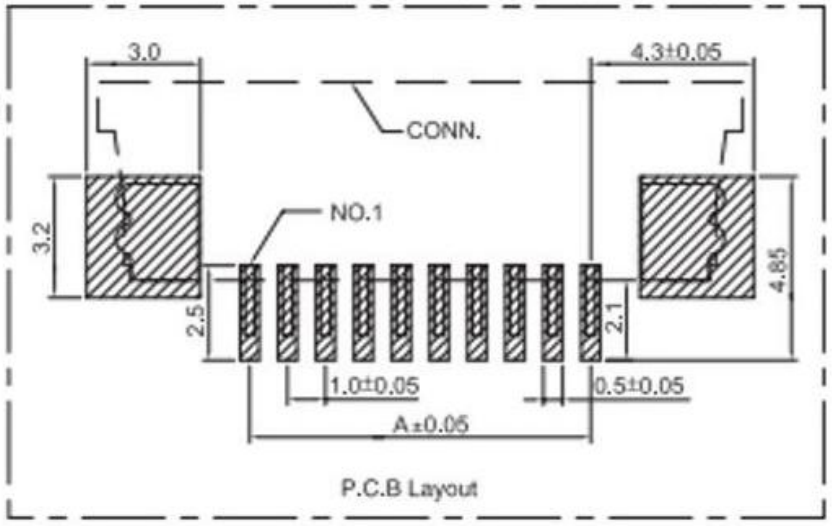


P.C.B Layout

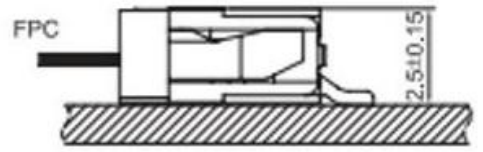


ASSEMBLY LAYOUT



下接触 Lower contact



上接触 Upper contact

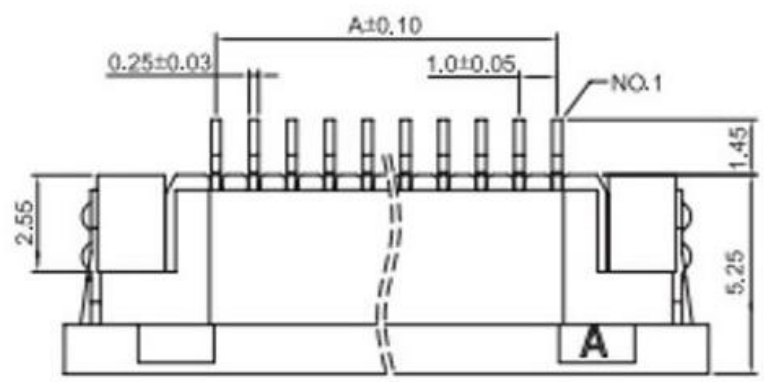

技术参数 Main Specifications

- 极数 CKT: 4 ~ 40
- 工作温度 Working Temperature: -25°C ~ +85°C
- 额定电压 Voltage rating(max): 50V, AC/DC
- 接触电阻 Contact resistance: ≤ 0.03Ω
- 绝缘电阻 Insulation resistance: ≥ 500MΩ
- 额定电流 Current rating: 0.5A
- 耐电压 Withstand voltage: 500VAC(rms)

材料 Material

- 接触端子 Terminal: 铜合金 Copper alloy
- 塑胶本体 Housing: UL 94V-0 LCP

CKT	尺寸 Size(mm)		
	A	B	C
4	3.00	5.03	11.00
5	4.00	6.03	12.00
6	5.00	7.03	13.00
7	6.00	8.03	14.00
8	7.00	9.03	15.00
10	9.00	11.03	17.00
12	11.00	13.03	19.00
16	15.00	17.03	23.00
20	19.00	21.03	27.00
24	23.00	25.03	31.00
28	27.00	29.03	35.00
30	29.00	31.03	37.00
32	31.00	33.03	39.00
36	35.00	37.03	43.00
40	39.00	41.03	47.00

GENERAL TOLERANCE		DRAWN	XIADHUI.SONG	09/27'17	SCALE	PART NO.
X.±0.30	x.'±3'	CHECKED	QUNYU.LI	09/27'17	N/A	TITLE
.X±0.25	.x'±2'	APPROVED	SKY	09/27'17	UNITS	mm
.XX±0.20			File NO.			
.XXX±0.10			REV.			
SHEET	1/1	Q'TY	1	B		

CUSTOMER DRAWING

广东科斯达开关厂