

备注:

塑胶: PBT+25%GF (UL 94V-0)

端子: 磷铜C519I R-H 镀底

50 μ "Min. 表面镀亮锡200 μ "Min.

性能:

额定电流: 1A, AC/DC

额定电压: 200V

接触阻抗: 30m Ω Max.


绝缘阻抗: 1000M Ω MIN.

耐电压值: 500V RMS

工作温度: -55 $^{\circ}$ C to +85 $^{\circ}$ C.

标记 \otimes 为FAI尺寸, 标记 ∇ 为重点
管控及首件检测尺寸

PIN	P/N	A	B	备注
2	11134-002003	10.74	2.54	P V C 收 缩 袋 十 保 丽 龙 片 包 装
3	11134-003005	13.28	5.08	
4	11134-004001	15.82	7.62	
5	11134-005003	18.36	10.16	
6	11134-006004	20.90	12.70	
7	11134-007004	23.44	15.24	
8	11134-008007	25.98	17.78	
9	11134-009001	28.52	20.32	
10	11134-010001	31.06	22.86	
11	11134-011001	33.60	25.40	
12	11134-012005	36.14	27.94	
13	11134-013005	38.68	30.48	
14	11134-014001	41.22	33.02	
15	11134-015003	43.76	35.56	
16	11134-016003	46.30	38.10	
17	11134-017004	48.84	40.64	
18	11134-018005	51.38	43.18	
19	11134-019001	53.92	45.72	
20	11134-020003	56.46	48.26	
21		59.00	50.80	
22	11134-022001	61.54	53.34	
23		64.08	55.88	
24		66.62	58.42	
25		69.16	60.96	
26		71.70	63.50	
27		74.24	66.04	

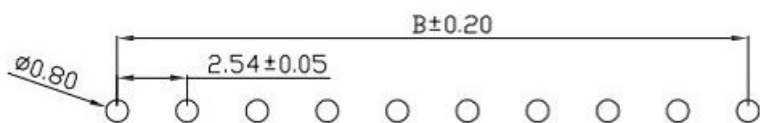

PCB LAYOUT

UNITS	mm
MATL	
FINISH	
Q'TY	PCS

科斯达电子科技有限公司

PART NO.(INTENDED USE)	TITLE: 2.54MM 180° 薄膜插座	
APPD:	DWG NO.: 2.54-	
CHKD:		
DR: HU 2016.09.28		
SCALE	SHEET	REV.
1/1	1/1	A

X \pm 0.3	X' \pm 5"
.X \pm 0.25	.X' \pm 2"
.XX \pm 0.20	.XX' \pm 1"
.XXX \pm 0.10	.XXX' \pm 0.5"