

广东科斯达电子科技有限公司


样品图规

CUSTOMER(客户):

Customer Part NO. (客户部品号):

Part Descripon(部品规格): 0.5*41*500*B(3/3*13/13)*(0.035*0.3裸铜)


Item	项目	Specification	规格值
NO. of conductors	导体芯数 N	41	
Pitch	间距 P	0.5 ± 0.05	
Total Pitch	全间距 PT	20 ± 0.05	
Total Length	总长度 L	500 ± 3	
Insulation Length	绝缘长度 IL	494 ± 3	
Margin Width	边缘宽度 M	2 ± 0.05	
Total Width	总宽度 W	24 ± 0.05	
Strip Length	线口长度 S1	3 ± 1	
Strip Length	线口长度 S2	3 ± 1	
Reinforeing tape length	补强板长度 B1	13 ± 1	
Reinforeing tape length	补强板长度 B2	13 ± 1	
Slanting	线口倾斜度 A	≤ 0.3	
Over lap	冲孔	/	
Terminal thickness	插入厚度 t1	0.32 ± 0.05	
Thickness insulation	线身厚度 t	0.155 ± 0.02	
Conductor thickness	导体厚度 Ct	0.035 ± 0.005	裸铜
Conductor width	导体宽度 Cw	0.3 ± 0.03	
Supporting Tapc Color	补强板颜色	蓝色(Blue)	
PET(Supporting Tapc Color)	补强板规格	0.225mm	
PET(Insulation)	绝缘胶规格	0.06mm 印字	
PET(Insulation)	绝缘胶规格	0.06mm 白色	
Rev	版本	A	

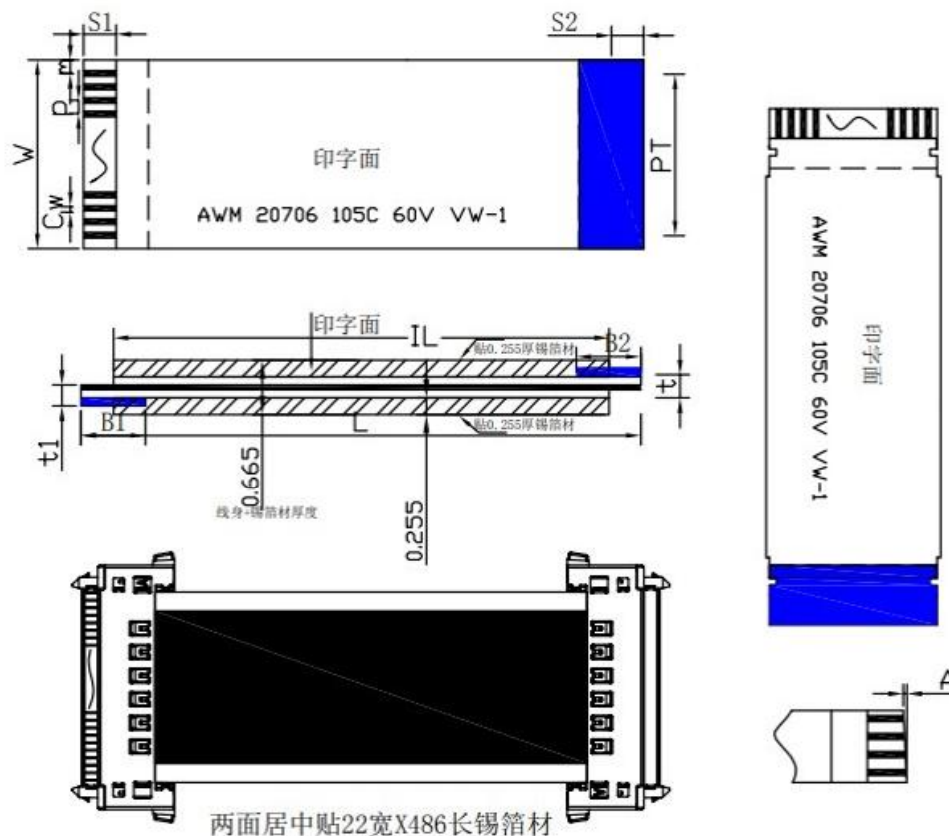

Storage condition(储存条件): Recommended(推荐)

Temp: 15° C~25° C(温度15° C~25° C) Humidity: 30~60RH%(湿度30~60RH%)

Drawing Not To Scale
Hidden Lines Not Shown
图规不能以其线材比便来
衡量, 隐藏线不显示。



Discharge Date
发行日期

2017-11-25

Drawing by
制图

Ling

Review Date
修订日期

Checked by
核对

Drawing NO
图纸编号

Approved by
确认