
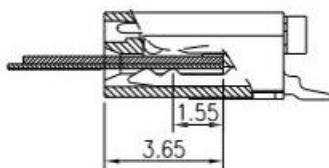




APPLICABLE FPC/FFC
(THICKNESS 0.3±0.03)



NOTES:

1. HOUSING: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR: BEIGE
2. ACTUATOR: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR: BLACK
3. TERMINAL: PHOSPHOR BRONZE
PLATING: GOLD FLASH OR MATTE-TIN OR TIN (LEAD FREE)
4. FITTING NAIL: BRASS
PLATING: MATTE-TIN OR TIN (LEAD FREE)

Dimensions

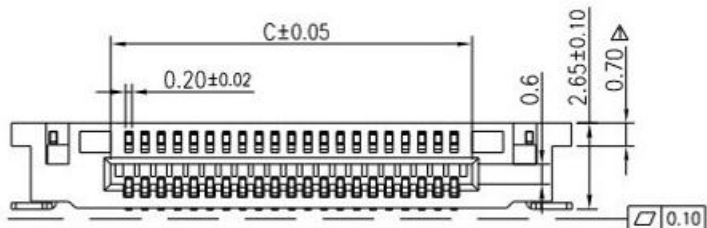

CABLE INSERT DIM.

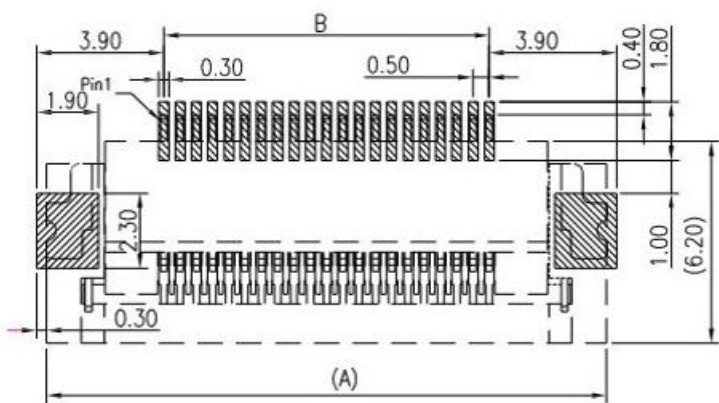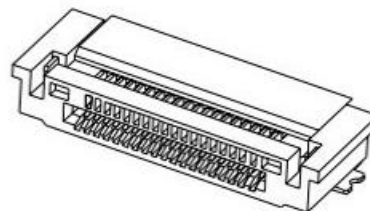

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

UNITS	mm
MAT'L	
FINISH	
Q'TY	PCS

X ± 0.3	X' ± 5°
.X ± 0.25	.X' ± 2°
.XX ± 0.20	.XX' ± 1°
.XXX ± 0.10	.XXX' ± 0.5°

科斯达电子科技有限公司

PART NO.(INTENDED USE)	TITLE:
05265-GX-nPWB	0.5前插后掀盖大锁扣 H2.65
APPD:	DWG NO.:
CHKD:	05265-GX-nPWB
DR: HU 2016.09.28	
	SCALE SHEET REV.
	1/1 1/1 A