
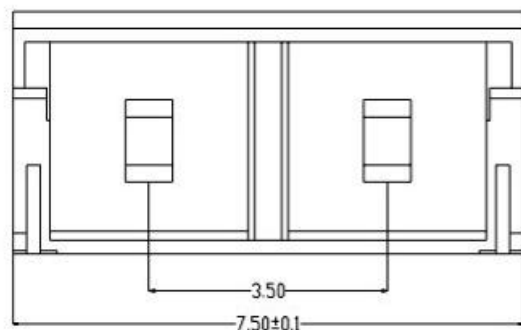
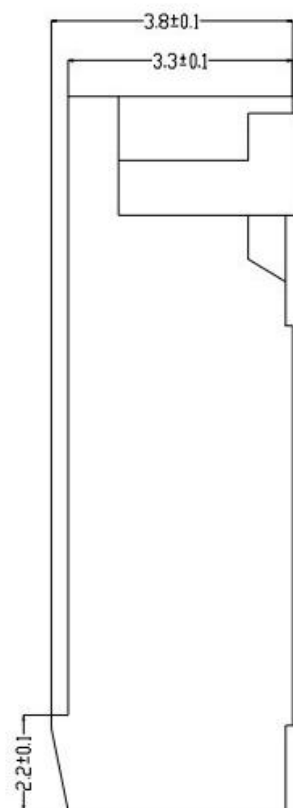
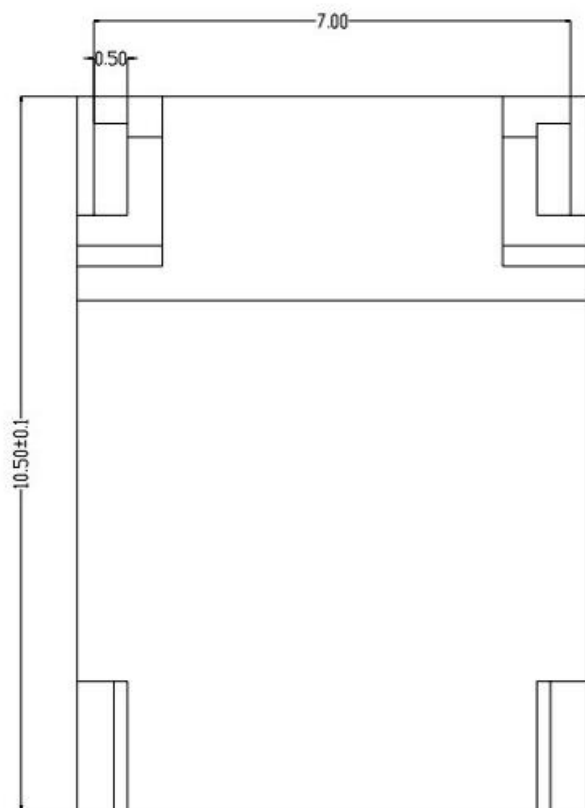




技术要求

1. 塑件表面应光洁, 无毛刺, 明显收缩, 缺陷, 裂纹等现象;
2. 插针表面电镀应光亮, 无斑纹, 划痕;
3. 未注公差按SJ1372-79中7级;
4. 温度范围: -25°C 85°C ;
5. 额定电压: 250V, AC, DC;
6. 接触电阻: $\leq 0.01\ \Omega$;
7. 绝缘电阻: $\geq 1000\text{m}\Omega$;
8. 耐压: 1500V, AC/minute

UNITS mm		科斯达电子科技有限公司					
MAT'L							
FINISH		PART NO.(INTENDED USE)		TITLE: 3.5-2P高压插座带扣			
		APPD:		DWG NO.: BH3.5-2P带扣			
Q'TY PCS		CHKD:			SCALE	SHEET	REV.
		DR: HU 2016.09.28			1/1	1/1	A

X ± 0.3	X° ± 5°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	.XX° ± 1°
.XXX ± 0.10	.XXX° ± 0.5°