
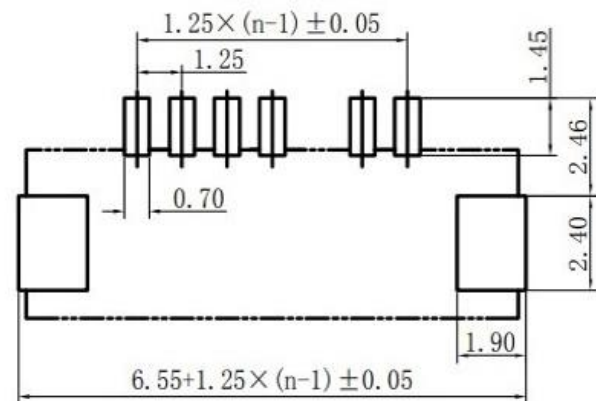
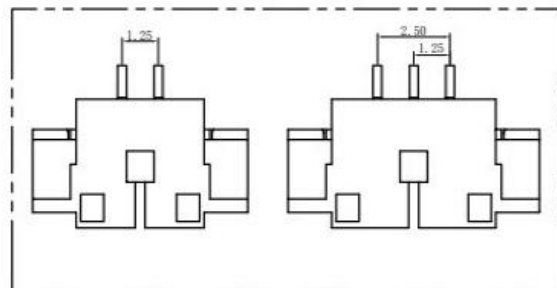


SECTION A-A

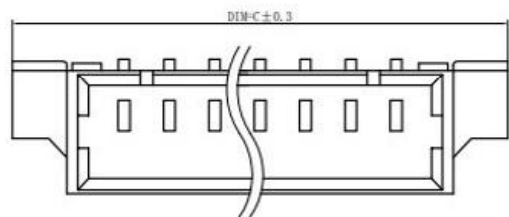

PC BOARD LAYOUT

Specifications:
 Housing: LCP UL94-V0 Color: Nature
 Contact: Phosphor Bronze
 Operating Voltage: 50V AC(rms)/DC
 Current Rating: 0.5A AC(rms)/DC
 Withstand Voltage: 200V AC/rms
 Contact Resistance: 40mΩ max
 Insulation resistance: 800 mΩ min
 Operating Temperature: -25℃ ~ +85℃

P 数	DIM=A	DIM=B	DIM=C
002	1.25		7.40
003	2.50		8.65
004	3.75	2.50	9.90
005	5.00	3.75	11.15
006	6.25	5.00	12.40
007	7.50	6.25	13.65
008	8.75	7.50	14.90
009	10.00	8.75	16.15
010	11.25	10.00	17.40
011	12.50	11.25	18.65
012	13.75	12.50	19.90
013	15.00	13.75	21.15
014	16.25	15.00	22.40
015	17.50	16.25	23.65
016	18.75	17.50	24.90
017	20.00	18.75	26.15
018	21.25	20.00	27.40
019	22.50	21.25	28.65
020	23.75	22.50	29.90

科斯达电子科技有限公司

檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION	工程 圖号	制圖 (DR) *10/09/22
① MARK IS CRITICAL DIM. ② MARK IS MAJOR DIM.	品名	審核 (CHKD)
表面處理 (FINISH)	TITLE MX1.25mm Pitch TB FOR SMT CONN	檢驗 (APPD) Rigo Lu
比例 (SCALE) 1:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1
		SIZE A4
		REV 0

修改 REV	修改 DESCRIPTION	日期 DATE	簽名 SIGNATURE
-----------	-------------------	------------	-----------------