
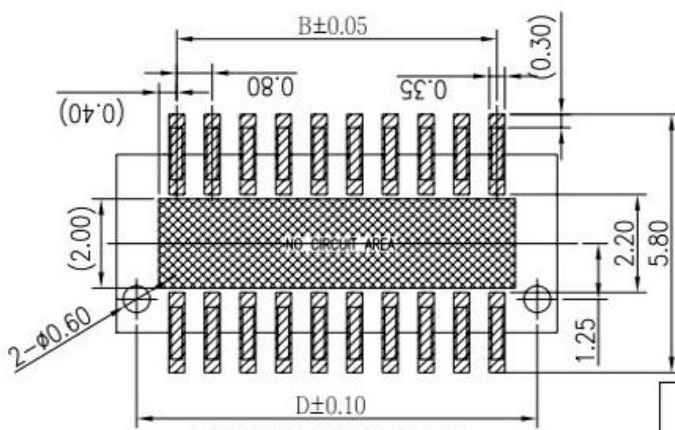
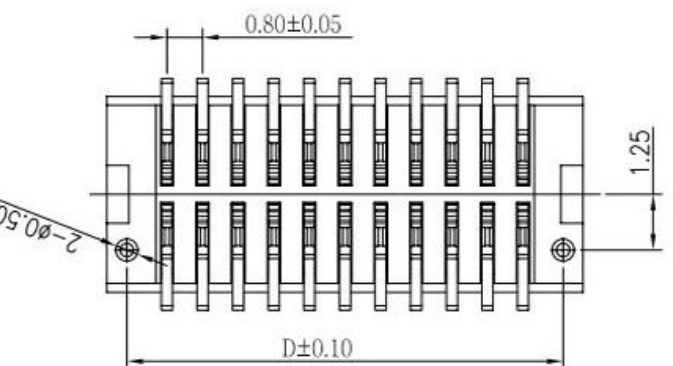

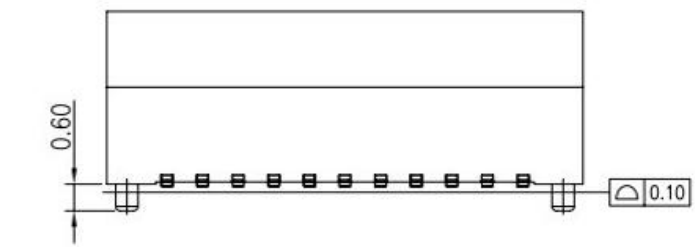
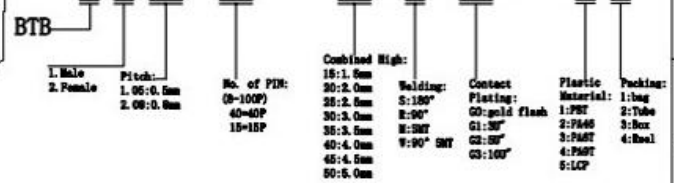


NOTES:

- HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

Ordering information






MATING HEIGHT	PLUG (H.)	SOCKET (H.)	NO.of contacts	Dimensions				NO.of contacts	Dimensions			
				A	B	C	D		A	B	C	D
4.0	1.0	3.0	4	3.50	0.80	1.86	2.60	54	23.50	20.80	21.86	22.60
4.5	1.0	3.5	6	4.30	1.60	2.66	3.40	56	24.30	21.60	22.66	23.40
5.0	1.0	4.0	8	5.10	2.40	3.46	4.20	58	25.10	22.40	23.46	24.20
5.5	1.0	4.5	10	5.90	3.20	4.26	5.00	60	25.90	23.20	24.26	25.00
6.0	2.0	4.0	12	6.70	4.00	5.06	5.80	62	26.70	24.00	25.06	25.80
6.5	2.0	4.5	14	7.50	4.80	5.86	6.60	64	27.50	24.80	25.86	26.60
16	8.30	5.60	6.66	7.40	66	28.30	25.60	26.66	27.40			
18	9.10	6.40	7.46	8.20	68	29.10	26.40	27.46	28.20			
20	9.90	7.20	8.26	9.00	70	29.90	27.20	28.26	29.00			
22	10.70	8.00	9.06	9.80	72	30.70	28.00	29.06	29.80			
24	11.50	8.80	9.86	10.60	74	31.50	28.80	29.86	30.60			
26	12.30	9.60	10.66	11.40	76	32.30	29.60	30.66	31.40			
28	13.10	10.40	11.46	12.20	78	33.10	30.40	31.46	32.20			
30	13.90	11.20	12.26	13.00	80	33.90	31.20	32.26	33.00			
32	14.70	12.00	13.06	13.80	82	34.70	32.00	33.06	33.80			
34	15.50	12.80	13.86	14.60	84	35.50	32.80	33.86	34.60			
36	16.30	13.60	14.66	15.40	86	36.30	33.60	34.66	35.40			
38	17.10	14.40	15.46	16.20	88	37.10	34.40	35.46	36.20			
40	17.90	15.20	16.26	17.00	90	37.90	35.20	36.26	37.00			
42	18.70	16.00	17.06	17.80	92	38.70	36.00	37.06	37.80			
44	19.50	16.80	17.86	18.60	94	39.50	36.80	37.86	38.60			
46	20.30	17.60	18.66	19.40	96	40.30	37.60	38.66	39.40			
48	21.10	18.40	19.46	20.20	98	41.10	38.40	39.46	40.20			
50	21.90	19.20	20.26	21.00	100	41.90	39.20	40.26	41.00			

广东科斯达科技有限公司

一般公差 GENERAL TOLERANCE	制图 (DR): Kevin 2016.07.25	品名(TITLE): BTB 0.8 2*NP SMT Female
.S ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	审核 (CHKD):	料号(PART NO):
版本 (REV): A	核准 (APPR):	比例(SCALE): 1:8 单位(UNITS): mm 张数(SHEET): 1 OF 1 图幅(SIZE): A4



修订 (REV)	修改 (MOD)	签名 (SIGNATURE)	日期 (DATE)

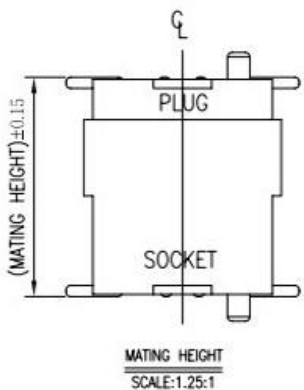
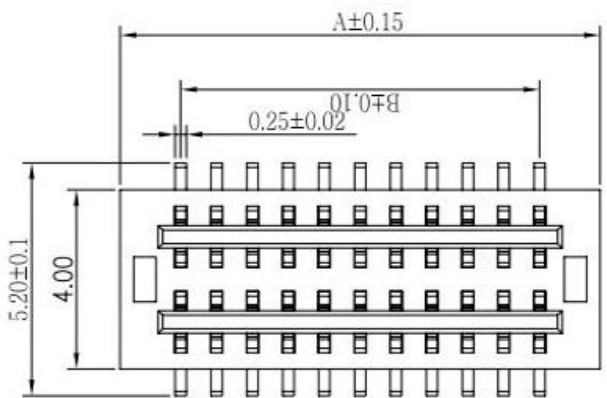


NOTES:



- 1.HOUSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:PHOSPHOR BRONZE PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

Ordering information

1. Male	Pitch:	No. of PIN:	Combined High:	Welding:	Contact Plating:	Plastic Material:	Packing:
2. Female	1.00:0.50 2.00:0.50	8~100P 40~60P 10~10P	18:1.5mm 20:2.0mm 25:2.5mm 30:3.0mm 35:3.5mm 40:4.0mm 45:4.5mm 50:5.0mm	S:180° R:90° N:SWT V:90° SWT	GD:gold flash G1:50" G2:50" G3:100"	1:PP 2:PA6 3:PA9T 4:PC 5:PC	1:bag 2:Tube 3:Box 4:Reel

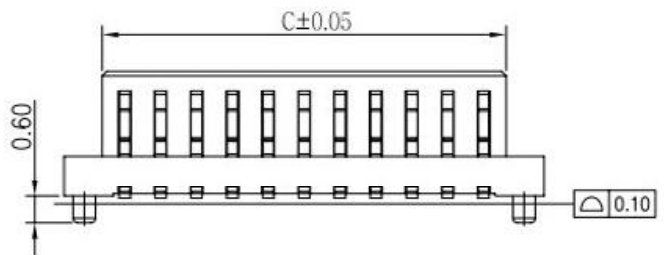

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	NO.of contacts	Dimensions				NO.of contacts	Dimensions			
				A	B	C	D		A	B	C	D
4.0	1.0	3.0	4	3.50	0.80	1.80	2.60	54	23.50	20.80	21.80	22.60
4.5	1.0	3.5	6	4.30	1.60	2.60	3.40	56	24.30	21.60	22.60	23.40
5.0	1.0	4.0	8	5.10	2.40	3.40	4.20	58	25.10	22.40	23.40	24.20
5.5	1.0	4.5	10	5.90	3.20	4.20	5.00	60	25.90	23.20	24.20	25.00
6.0	2.0	4.0	12	6.70	4.00	5.00	5.80	62	26.70	24.00	25.00	25.80
6.5	2.0	4.5	14	7.50	4.80	5.80	6.60	64	27.50	24.80	25.80	26.60
16			16	8.30	5.60	6.60	7.40	66	28.30	25.60	26.60	27.40
18			18	9.10	6.40	7.40	8.20	68	29.10	26.40	27.40	28.20
20			20	9.90	7.20	8.20	9.00	70	29.90	27.20	28.20	29.00
22			22	10.70	8.00	9.00	9.80	72	30.70	28.00	29.00	29.80
24			24	11.50	8.80	9.80	10.60	74	31.50	28.80	29.80	30.60
26			26	12.30	9.60	10.60	11.40	76	32.30	29.60	30.60	31.40
28			28	13.10	10.40	11.40	12.20	78	33.10	30.40	31.40	32.20
30			30	13.90	11.20	12.20	13.00	80	33.90	31.20	32.20	33.00
32			32	14.70	12.00	13.00	13.80	82	34.70	32.00	33.00	33.80
34			34	15.50	12.80	13.80	14.60	84	35.50	32.80	33.80	34.60
36			36	16.30	13.60	14.60	15.40	86	36.30	33.60	34.60	35.40
38			38	17.10	14.40	15.40	16.20	88	37.10	34.40	35.40	36.20
40			40	17.90	15.20	16.20	17.00	90	37.90	35.20	36.20	37.00
42			42	18.70	16.00	17.00	17.80	92	38.70	36.00	37.00	37.80
44			44	19.50	16.80	17.80	18.60	94	39.50	36.80	37.80	38.60
46			46	20.30	17.60	18.60	19.40	96	40.30	37.60	38.60	39.40
48			48	21.10	18.40	19.40	20.20	98	41.10	38.40	39.40	40.20
50			50	21.90	19.20	20.20	21.00	100	41.90	39.20	40.20	41.00

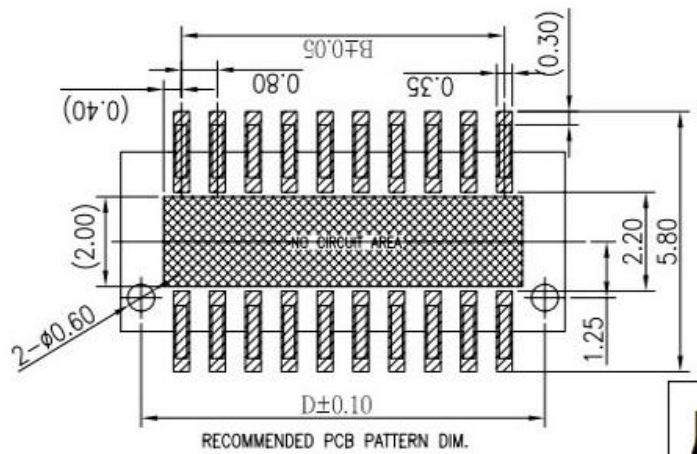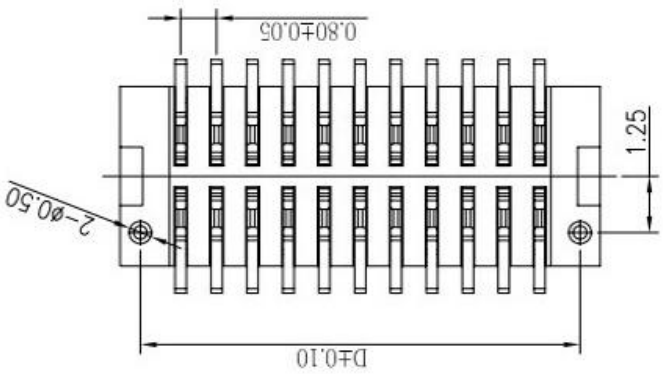

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

广东科斯达科技有限公司

一般公差 GENERAL TOLERANCE	Kevin 2016.07.25	品名(TITLE): BTB 0.8mm 2*NP SMT MALE
.5 ±0.25	审核(CHECK):	料号(PART NO):
.XX ±0.15	版本(REV): A	比例(SCALE): 1:8
.XXX ±0.05	日期(DATE):	单位(UNITS): mm
ANGLES ±1°	核准(APPD):	张数(SHEET): 1 OF 1
		幅图(SIZE): A4



修订号(REV)	修改摘要(DESCRIPTION)	签名(SIGNATURE)	日期(DATE)