
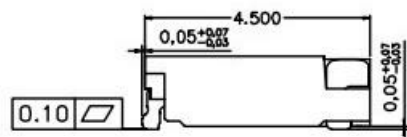





SPECIFICATIONS

Current Rating: 1.5A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-plated
 Solder Tabs: Brass/Gold-plated
 Material: Nylon 6T,UL94V-0
 Color: Black
 Qty/reel: 4500pcs

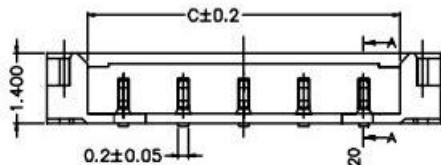

Ordering Information & Dimensions

PIN	A	B	C
2	1.20	4.20	2.65
3	2.40	5.40	3.85
4	3.60	6.60	5.05
5	4.80	7.80	6.25
6	6.00	9.00	7.45
7	7.20	10.20	8.65

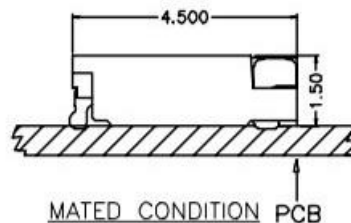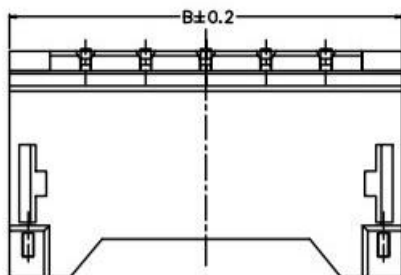

UNITS	mm
MAT'L	
FINISH	
Q'TY	PCS

科斯达电子科技有限公司

X.± 0.3	X°.± 5'
.X± 0.25	.X°.± 2'
.XX± 0.20	.XX°.± 1'
.XXX± 0.10	.XXX°.± 0.5'

PART NO.(INTENDED USE)	TITLE: 1.2mm PITCH 180°WAFER-SMT TYPE ULTRA LOW PROFILE						
APPD:	DWG NO.:						
CHKD:							
DR: HU 2016.09.25							
	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1/1</td> <td>1/1</td> <td>A</td> </tr> </table>	SCALE	SHEET	REV.	1/1	1/1	A
SCALE	SHEET	REV.					
1/1	1/1	A					