
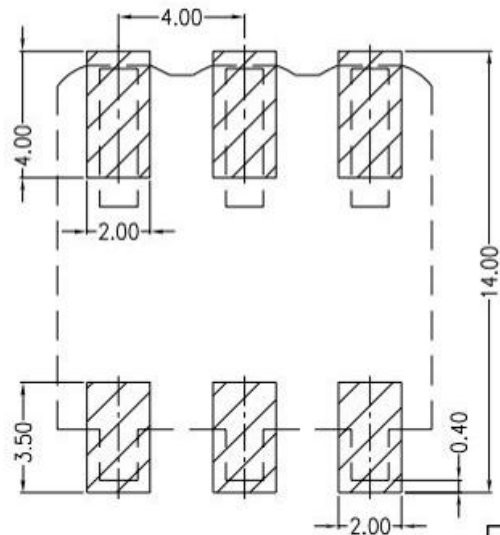


Installation drawing

主要技术参数 Main Specifications

- 线 数 (Poles): 01 to 03P
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 800M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 9.0A AC DC
- 耐电压 (Withstand Voltage): 800V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +105^{\circ}C$

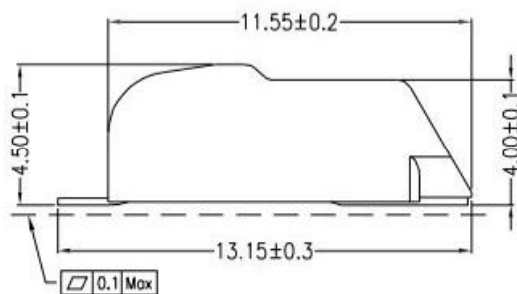


Board Layout

ORDER INFORMATION:

PART No.		PACKAGING:
No. OF CIRCUITS:		R=REEL
03		P=PE
PLASTIC MATERIAL:		PLATING:
F1C=LCP (BEIGE)		B=MATTE Sn

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
B	CONTACT	3 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

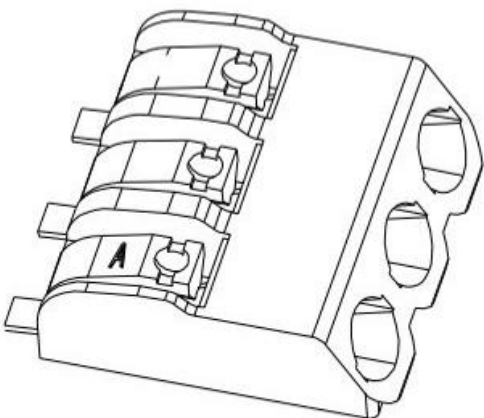

UNITS	mm
MAT'L	
FINISH	
Q'TY	PCS

科斯达电子科技有限公司

X.± 0.3	X'.± 5'
.X± 0.25	.X'± 2'
.XX± 0.20	.XX'± 1'
.XXX± 0.10	.XXX'± 0.5'

PART NO.(INTENDED USE)	TITLE:
	4.0mmPITCH 90°WAFER SMT TYPE
APPD:	DWG NO.:
CHKD:	
DR: HU 2016.09.28	



SCALE	SHEET	REV.
1/1	1/1	A