
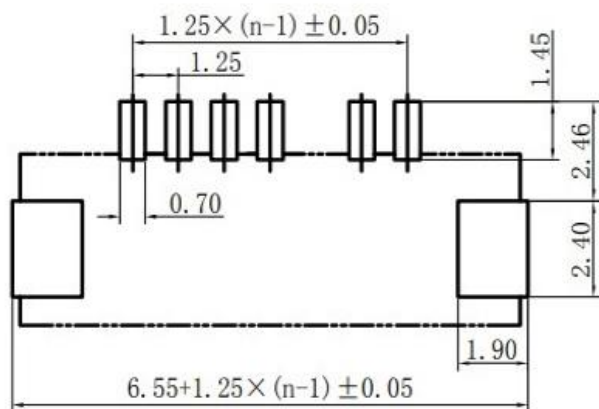
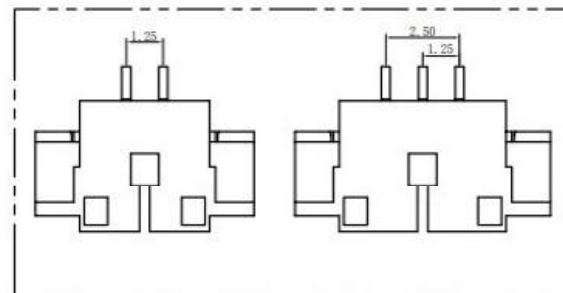
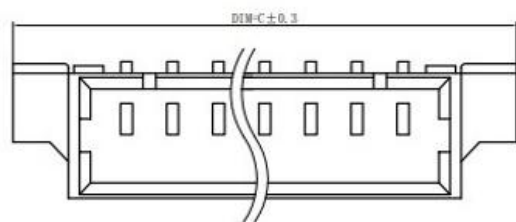


SECTION A-A



PC BOARD LAYOUT

Specifications:
 Housing: LCP UL94-V0 Color: Nature
 Contact: Phosphor Bronze
 Operating Voltage: 125V AC/DC
 Current Rating: 1A AC/DC
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 100m\Omega$
 Operating Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

P数	DIM=A	DIM=B	DIM=C
002	1.25		7.40
003	2.50		8.65
004	3.75	2.50	9.90
005	5.00	3.75	11.15
006	6.25	5.00	12.40
007	7.50	6.25	13.65
008	8.75	7.50	14.90
009	10.00	8.75	16.15
010	11.25	10.00	17.40
011	12.50	11.25	18.65
012	13.75	12.50	19.90
013	15.00	13.75	21.15
014	16.25	15.00	22.40
015	17.50	16.25	23.65
016	18.75	17.50	24.90
017	20.00	18.75	26.15
018	21.25	20.00	27.40
019	22.50	21.25	28.65
020	23.75	22.50	29.90

科斯达电子科技有限公司

按尺寸标示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION	工程图号	制图 (DR) *10/02/22
① MARK IS CRITICAL DIM. ② MARK IS MAJOR DIM.	品名 MX1.25mm - nP 卧贴	审核 (CHKD)
表面处理 (FINISH)	TITLE MX1.25mm Pitch TB FOR SMT CONN	核准 (APPD) Rigo Lu
比例 (SCALE) 1:1	单位 (UNITS) mm	张数 (SHEET) 1 OF 1
		尺寸 (SIZE) A4
		版本 (REV) 0

REV	修改描述 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
△			