
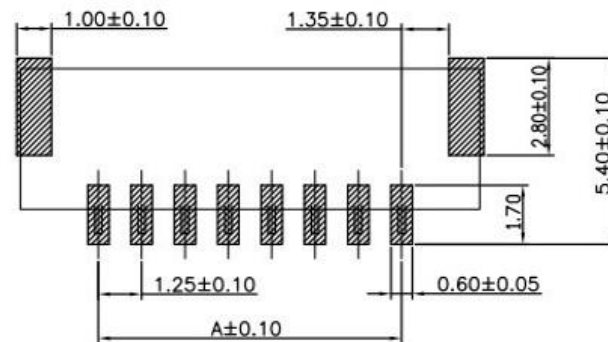
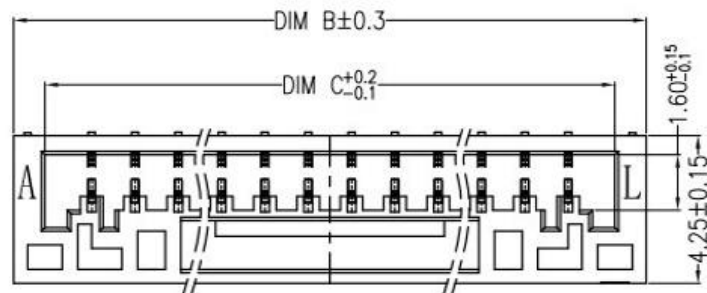


Specifications:  
 Housing: LCP UL94-V0  
 Contact: Phosphor Bronze  
 Operating Voltage: 50V AC/DC  
 Current Rating: 1.0A AC/DC  
 Withstand Voltage: 500V AC/Minute  
 Contact Resistance: <math>\leq 20\text{m}\Omega</math>  
 Insulation resistance: >math>\geq 100\text{m}\Omega</math>  
 Operating Temperature: -25°C ~ +85°C

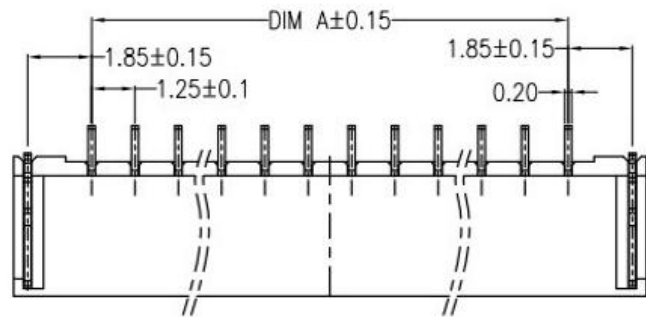

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

孔位	尺寸	DIM A	DIM B	DIM C	DIM E
2P		1.25	5.75	3.75	0.75
3P		2.50	7.00	5.00	1.60
4P		3.75	8.25	6.25	2.65
5P		5.00	9.50	7.50	2.50
6P		6.25	10.75	8.75	4.65
7P		7.50	12.00	10.00	4.65
8P		8.75	13.25	11.25	4.65
9P		10.00	14.50	12.50	4.65
10P		11.25	15.75	13.75	6.60
11P		12.50	17.00	15.00	6.60
12P		13.75	18.25	16.25	6.60
13P		15.00	19.50	17.50	6.60
14P		16.25	20.75	18.75	6.60
15P		17.50	22.00	20.00	6.60

# 科斯达电子科技有限公司

檢驗尺寸標示 SYMBOLS $\odot$ $\ominus$ INDICATE CLASSIFICATION DIMENSION	工程 圖号	制圖 (DR) 08/5/16
$\odot$ MARK IS CRITICAL DIM. $\ominus$ MARK IS MAJOR DIM.	品名	審核 (CHKD)
表面處理 (FINISH)	TITLE GH1.25mm Pitch TB FOR SMT CONN	檢驗 (APPD) Rigo Lu
	比例 (SCALE) 1:1	單位 (UNITS) mm
		張數 (SHEET) 1 OF 1
		SIZE A4
		REV 0

REV	修改摘要 REVISION DESCRIPTION	日期 DATE	簽名 SIGNATURE
△			