

性能:

额定电流: 1A

额定电压: 100V




耐电压: 500V

接触电阻: $\leq 20\text{m}\Omega$ 绝缘电阻: $500\text{M}\Omega$ 工作温度: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$


塑件(材质): LCP, UL94V-0

插簧(材质): 黄铜, 镀锡

焊片(材质): 磷青铜, 镀锡

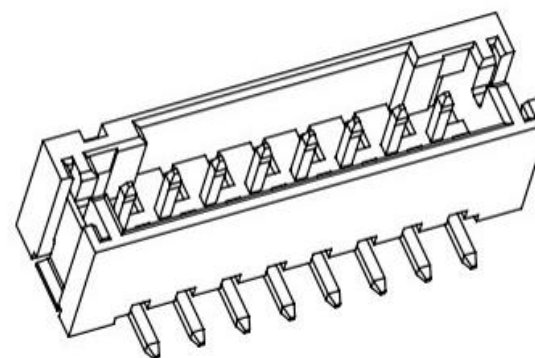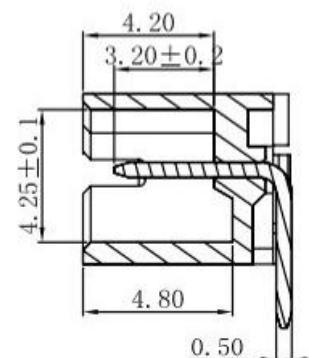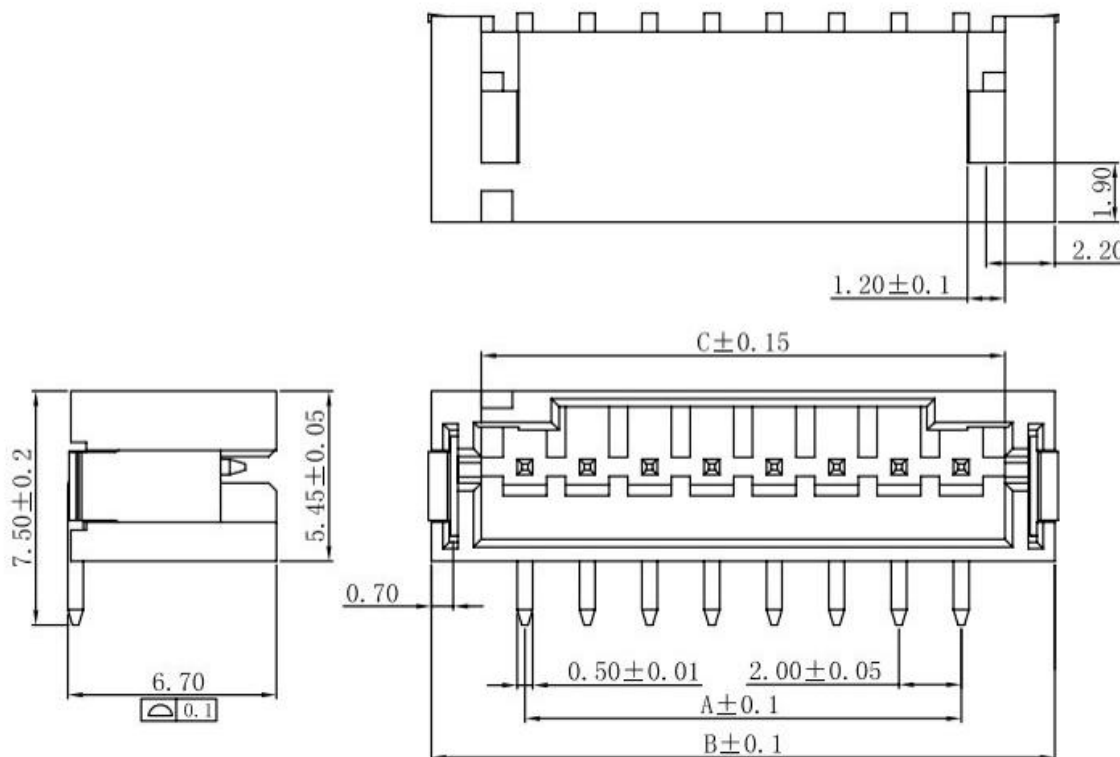

孔位	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80

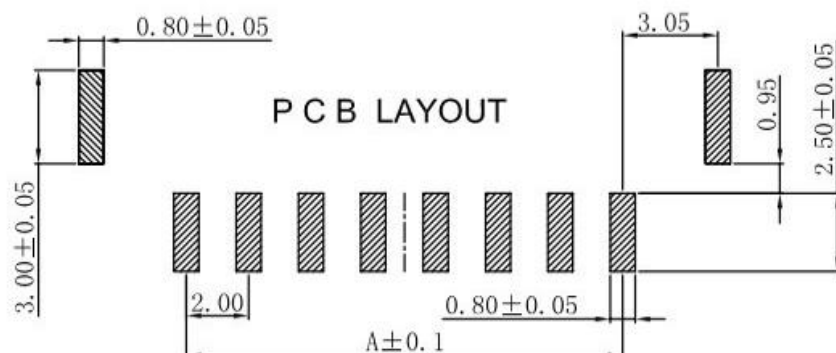

$X \pm 0.20$	$X^{\circ} \pm 5^{\circ}$	UNITS mm
$.X \pm 0.15$	$.X^{\circ} \pm 2^{\circ}$	MAT'L
$.XX \pm 0.08$	$.XX^{\circ} \pm 1^{\circ}$	FINISH
$.XXX \pm 0.05$	$.XXX^{\circ} \pm 0.5^{\circ}$	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JU MING ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JU MING ELECTRON FACTORY		Q'TY

科斯达电子科技有限公司

PART NO.(INTENDED USE)
2.0-B-nPB

TITLE:

2.0 立贴/wafer

APPD:

DWG NO.:

CHKD:

DR: huang sheng2013-02-02



SCALE SHEET REV.