

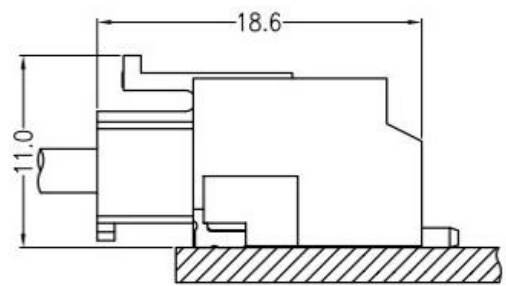


Specifications
 Housing: PA9T Color: Nature
 Contact: Phosphor Bronze
 Operating Voltage: 250V AC/DC
 Current Rating: 7A AC/DC
 Withstand Voltage: 1500V AC/Minute
 Contact Resistance: $\leq 20m\Omega$
 Insulation resistance: > 1000m Ω
 Operating Temperature: -25°C ~ +85°C

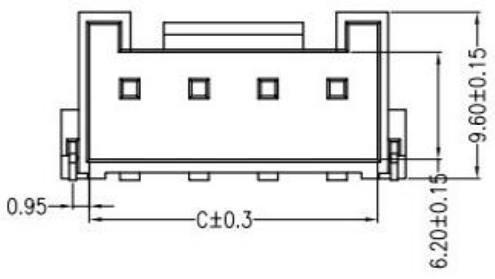

Receptacle+ Header

Pin	Dimensions (mm)			Pin	Dimensions (mm)		
	A	B	C		A	B	C
02	3.96	11.80	8.60	10	35.64	43.48	40.28
03	7.92	15.76	12.56	11	39.60	47.44	44.24
04	11.88	19.72	16.52	12	43.56	51.40	48.20
05	15.84	23.68	20.48	13	47.52	55.36	52.16
06	19.80	27.64	24.44	14	51.48	59.32	56.12
07	23.76	31.60	28.40	15	55.44	63.28	60.08
08	27.72	35.56	32.36	16	59.40	67.24	64.04
09	31.68	39.52	36.32				

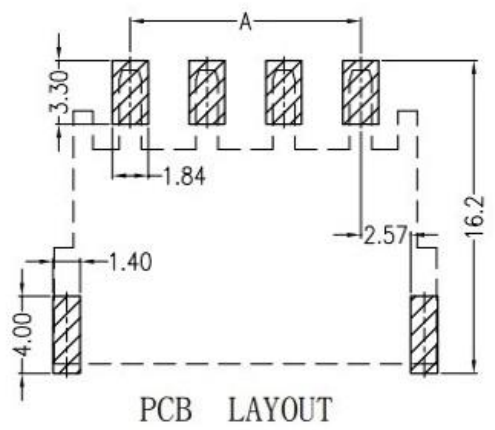

PCB LAYOUT

科斯达电子科技有限公司

被检尺寸标示 SYMBOLS \odot \ominus INDICATE CLASSIFICATION DIMENSION	工程 图号	制图 (DR) 2016/6/16
\odot MARK IS CRITICAL DIM. \ominus MARK IS MAJOR DIM.	品名	审核 (CHKD)
表面处理 (FINISH)	TITLE VHS.96mm Pitch WS FOR SMT CONN	核准 (APPD) Rigo Lu
比例 (SCALE) 1:1	单位 (UNITS) mm	张数 (SHEET) 1 OF 1
		SIZE A4
		REV 0

REV	REVISION DESCRIPTION	DATE	SIGNATURE
1			