
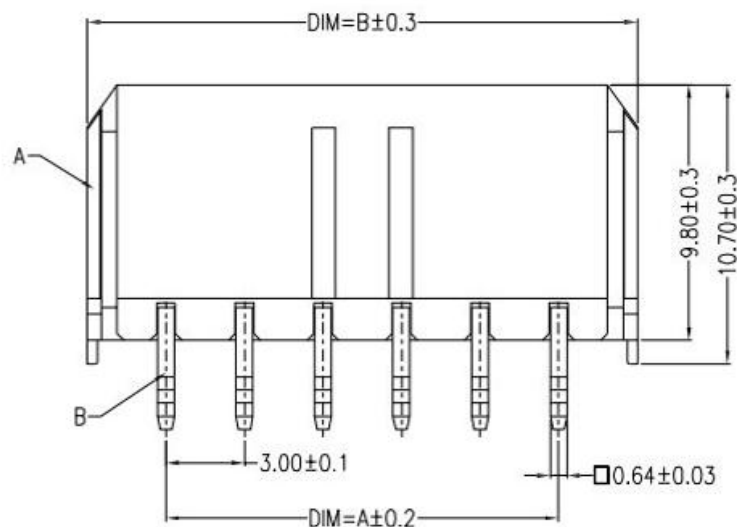
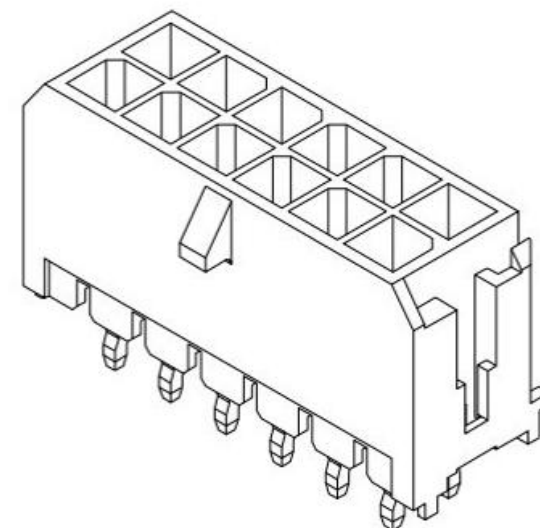
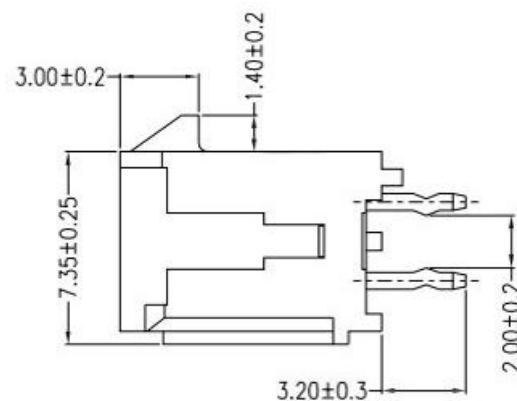


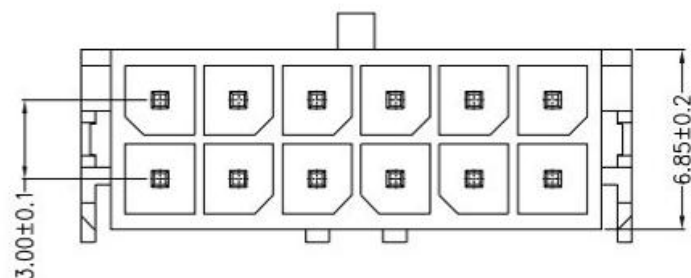

PART NO.	Dimensions (mm)	
	A	B
A3001A-2*01	-	6.05
A3001A-2*02	3.00	9.05
A3001A-2*03	6.00	12.05
A3001A-2*04	9.00	15.05
A3001A-2*05	12.00	18.05
A3001A-2*06	15.00	21.05
A3001A-2*07	18.00	24.05
A3001A-2*08	21.00	27.05
A3001A-2*09	24.00	30.05
A3001A-2*10	27.00	33.05
A3001A-2*11	30.00	36.05
A3001A-2*12	33.00	39.05

主要技术参数 Main Specifications

线 数 (Poles): 02 to 24

接触电阻 (Contact resistance): $\leq 10\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$


额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 5.0A AC DC

耐 电 压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
A	Insulator	1	PA66 (UL94V-0)	Beige
B	Contacts	2~24	Brass	Tin-plated

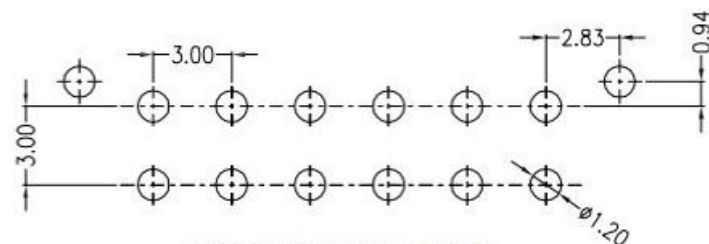

SUGGESTED PCB LAYOUT

UNITS
mm

MAT'L

FINISH

Q'TY

PCS

X ± 0.3	X' ± 5'
.X ± 0.25	.X' ± 2'
.XX ± 0.20	.XX' ± 1'
.XXX ± 0.10	.XXX' ± 0.5'

科斯达电子科技有限公司

PART NO.(INTENDED USE)

APPD:

CHKD:

DR: HU 2016.09.28

TITLE:

DWG NO.:

A3001A-2***

MX3.0双排直针

SCALE

1/1

SHEET

1/1

REV.

A