
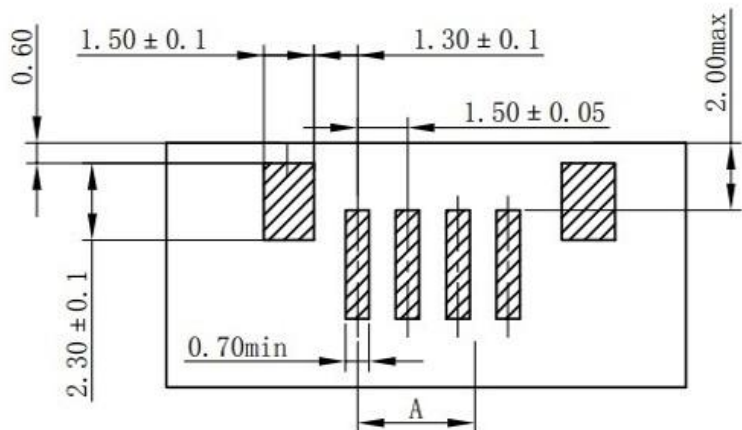


- 1< Current rating:1A AC\DC (AWG #26)
 - 2< Voltage rating: 50V AC\DC
 - 3< Temperature range: -25= to 85=
 - 4< Contact resistance:Initial value/20m Ω max
Electrical properties
 - 5< Insulation resistance:500M Ω min
 - 6< Withstanding voltage:500V AC/ minute
 - 7< Applicable wire:AWG #30 to #26
- Environmental controls
- 1< Banned contains SS - 00259 are restricted substances.
 - 2< The corresponding issued by SGS or ITS icp-aes data,
Not the material in a list, and validity.

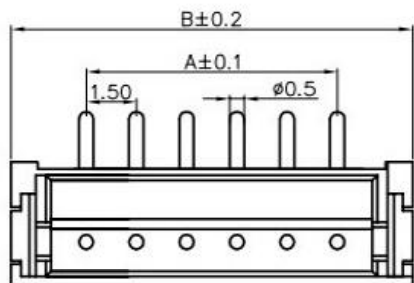

PCB LAYOUT

P数	A	B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.0

科斯达电子科技有限公司

檢驗尺寸標示 SYMBOLS ① ② INDICATE CLASSIFICATION DIMENSION	工程 圖号	制圖 (DR) 12/5/16
◎ MARK IS CRITICAL DIM. ② MARK IS MAJOR DIM.	品名 1.5mm - nP 立貼	審核 (CHKD)
表面處理 (FINISH)	TITLE ZH1.5mm Pitch LB FOR SMT CONN	核准 (APPD) Rigo Lu
比例 (SCALE) 1:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1
		SIZE A4
		REV 0

△			
REV	修改摘要 REVISION DESCRIPTION	日期 DATE	簽名 SIGNATURE