


Technolo Request:

- 1.Outlook:  
NO burr,no hurt.
- 2.Electronic performance:
  - a:Insulation resistance:  
Above DC500V/100M $\Omega$ ;
  - b:Endure voltage:  
AC500V at 1 minute;
  - c:Contact resistance:  
Under 30M $\Omega$ ;
- 3.Insertion fore & withdrawal force;0.3-3kgf.
- 4.Salt spray test :24H.
- 5.Meet RoHS.

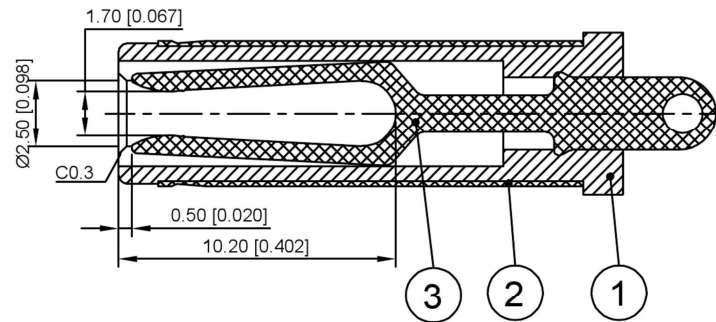

	MATERIAL	PLATING
Terminal	phosphor bronze	NI
Fork hook tube	H65	NI
Plastic	Pbt	Black

REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: DC PLUG		
							ANGULAR					
							$L \leq 4$	$\pm 5^\circ$				
							$4 < L \leq 16$	$\pm 0.2$				
							$16 < L \leq 63$	$\pm 0.3$				
							$L > 63$	$\pm 0.4$				
							$L > 63$	$\pm 0.5$				
								APPD	VIEW:	PART NO.: DT-2255525		
									UNIT: mm/in	DWG NO.:		
									SIZE: A4			
								KE SI DA ELECTRONIC TECHNOLOGY CO., LTD		WEIGHT	SHEET	REVISION
										1/1	A0	

**KSD**  
SWITCH CONNECTOR