

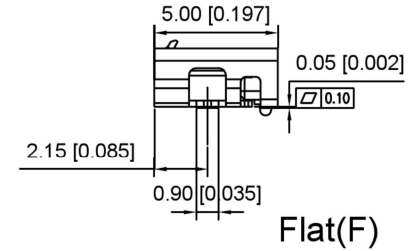



Scrolls (S)

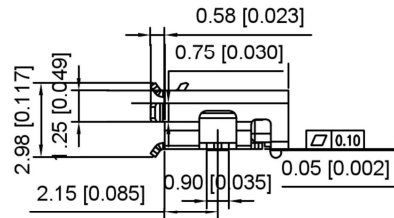

Flat(F)

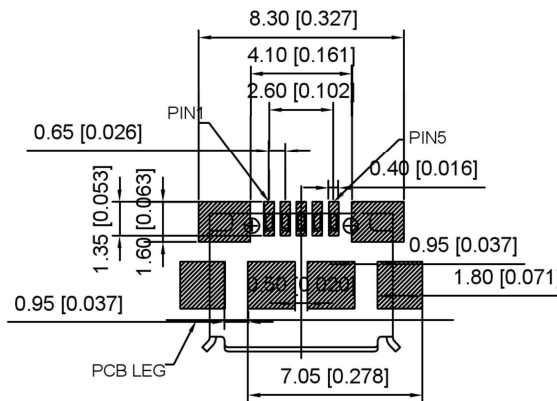

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

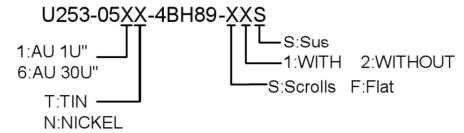

Material
Housing Material: LCP, UL94V-0, black
Contact Terminal: Copper Alloy
Metallic Shell: Sus
Electrical
Voltage Rating: 30 V AC
Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A
Contact Resistance: 30mΩ Max
Insulation resistance: 1000MΩ Min
Dielectric withstanding voltage: 250V AC/Minute
Mechanical
Durability: 10,000 cycles
Mating Force: 35N (3.57Kgf) Max
Unmating Force: 8N (0.82Kgf) Min.

				ANGLAR	±5°	DSND		SCALE: N/A	MODEL TYPE: MICRO USB					
				L ≤ 4	±0.2	DWN		VIEW:	PART NO.:					
				4 < L ≤ 16	±0.3	CHKD		UNIT: mm/in	DWG NO.:					
				16 < L ≤ 63	±0.4	APPD		SIZE: A4	U253-05XX-4BH89-XXS					
				L > 63	±0.5				WEIGHT	SHEET	REVISION			
DESCRIPTION				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES							
REVISIONS							KE SI DA ELECTRONIC TECHNOLOGY CO., LTD							
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM				WWW.KSDKG.COM						
											1/1	A0		