



P.C.B LAYOUT

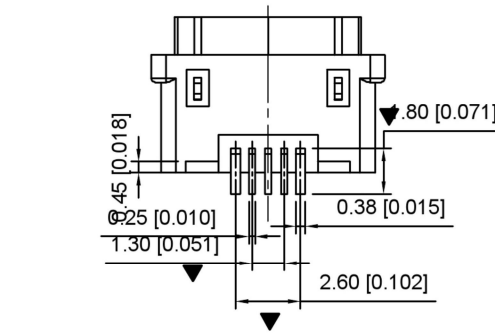

Notes:
 1. Dimension shall be interpreted per ASME Y14.5M1994
 2. Dimension marked ▽ & ▼ should be checked by Q.C. and process, engineers and ▽ should also check the CPK data
 Specification:
 1. Current Rating: 2.0 AMP
 2. Voltage Rating: 30V AC, DC
 3. Dielectric Strength: 500V AC RMS for 1 minute
 4. Contact Resistance: 30mΩ Max.
 5. Insulator Resistance: 500M 2Min. AT 250V DC.
 6. Mating/Unmating cycles: 2000cycles
 7. Temperature: -20°C to +60°C

3	Shell	1	SUS304R-1/2H Ni Plating T=0.30mm(3U)	
2	Contact	5	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm (1U)	
1	Housing	1	PA9T&LCP (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

				ANGLAR	±5°	DSND		SCALE: N/A	MODEL TYPE: MICRO USB		
				L ≤ 4	±0.2	DWN		VIEW:	PART NO.:		
				4 < L ≤ 16	±0.3	CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4	APPD		SIZE: A4	U-E-M5SS-W-3		
				L > 63	±0.5				WEIGHT	SHEET	REVISION
DESCRIPTION				DATE	REVISED	APPROVED				1/1	A0
REVISIONS				UNSPECIFIED TOLERANCES			KE SI DA ELECTRONIC TECHNOLOGY CO., LTD				
WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM											

