



U221-04XN-4BU02-XS

- 1: Au 1U"
- 5: Au 15U"
- 6: Au 30U"
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP
- S: SUS
- S: Scrolls F: Flat
- W: WHITE B: BLACK

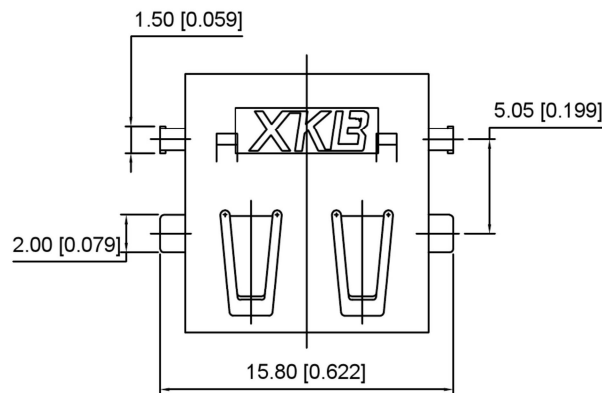

F : Flat




Housing Material: LCP 94V-0, black/White
 Contact Terminal: COPPER ALLOY. (T=0.25mm)
 Metallic Shell: SUS

FINISH:

- 2-1. CONTACT: UNDER PLATED 50u" MIN NICKEL ALL AREA.
100u" MIN TIN IN SOLDER TAIL AREA.
30u" MIN. GOLD PLATED AT CONTACT AREA.
- 2-2. SHELL: NICKEL 50u" MIN. PLATING OVERALL.

ENVIRONMENTAL CHARACTERISTICS:

- 3-1. OPERATION TEMPERATURE RANGE : -10°C TO +85°C.

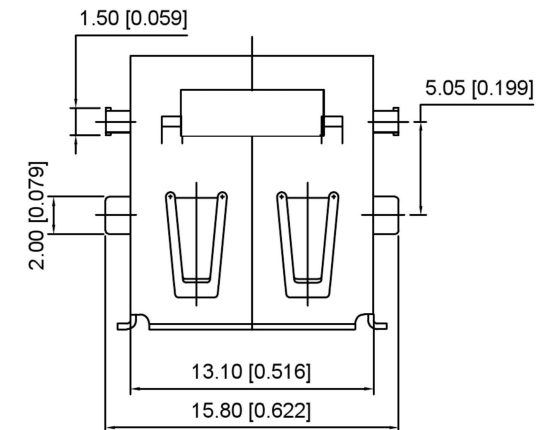

S: Scrolls

				ANGLAR	±5°	DSND		SCALE: N/A	MODEL TYPE: USB 2.0		
				L ≤ 4	±0.2	DWN		VIEW:	PART NO.:		
				4 < L ≤ 16	±0.3	CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4	APPD		SIZE: A4	U221-04XN-4BU02-XS		
				L > 63	±0.5				WEIGHT	SHEET	REVISION
DESCRIPTION				DATE	REVISED	APPROVED	KE SI DA ELECTRONIC TECHNOLOGY CO., LTD			1/1	A0
REVISIONS				UNSPECIFIED TOLERANCES							
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM			WWW.KSDKG.COM				