

SPECIFICATIONS 规格:

Contact current Rating 接触电流额定值:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage 介电耐压:AC 100V(RMS)

Insulation resistance 绝缘电阻:100Megohms Minimum.

Contact Resistance 接触电阻:

30mΩ Max for pin1&pin4

50mΩMax for other contacts

Mechanical Characteristics 机械特性:


Mating Force 配合力:35 Newtons.Maximum

Unmating Force 拔出力:10 Newtons.Minimum.

Operating Temperature 工作温度:-40 °C+85 °C

U231-09XN-4BLCC14-F5

1:Au 1U"
5:Au 15U"
6:Au 30U"
S:Scrolls F:Flat
B:BLACK
W:WHITE
BL:BLUE

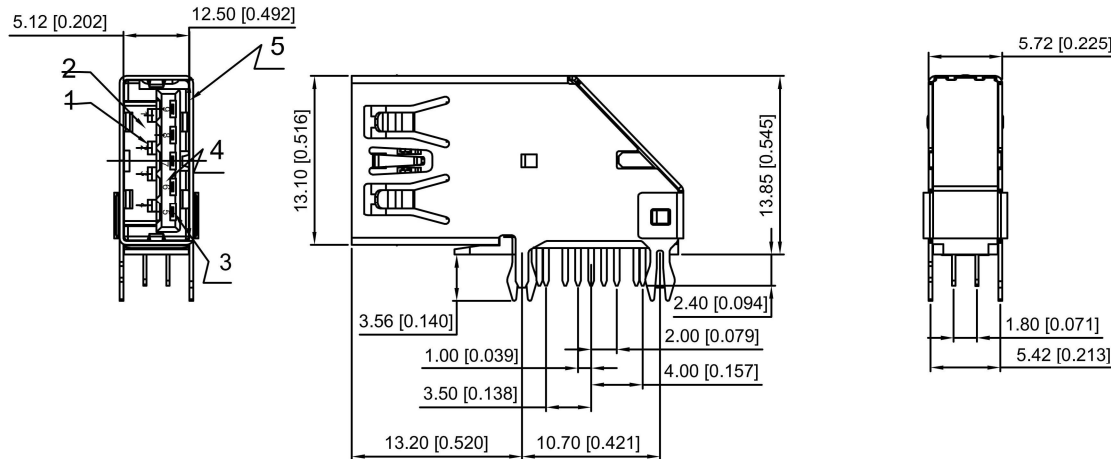

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

ITEM	PART NAME	Material	Q'TY	REMARK
1	4P Semi-manufactured Goods	Housing LCP	1	Blue UL94V-0
2		Contact COPPER ALLOY	4	T=0.25 Plating Gild/Tin
3	5P Semi-manufactured Goods	Housing LCP	1	Blue UL94V-0
4		Contact COPPER ALLOY	5	T=0.25 Plating Gild/Tin
5	Shell	Stainless Steel	1	T=0.3

					DSND	SCALE: N/A	MODEL TYPE: USB 3.0
ΔX				ANGULAR	DWN	VIEW:	PART NO.:
ΔX				L ≤ 4	CHKD	UNIT: mm/in	DWG NO.:
ΔX				4 < L ≤ 16	APPD	SIZE: A4	U231-09XN-4BLCC14-F5
MARK	DESCRIPTION	DATE	REVISED	APPROVED			WEIGHT
REVISIONS							SHEET
UNSPECIFIED TOLERANCES					KE SI DA ELECTRONIC TECHNOLOGY CO., LTD		REVISION
WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM							1/1
							A0

