
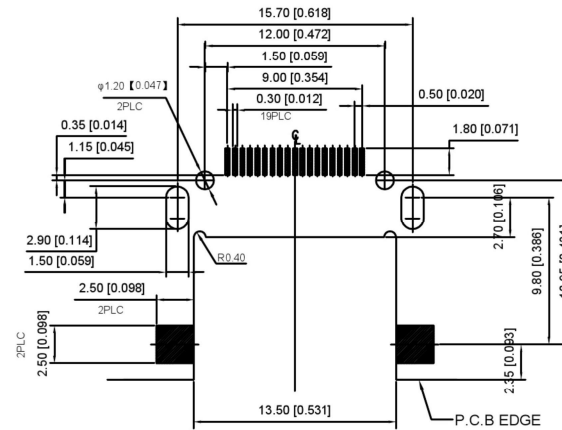
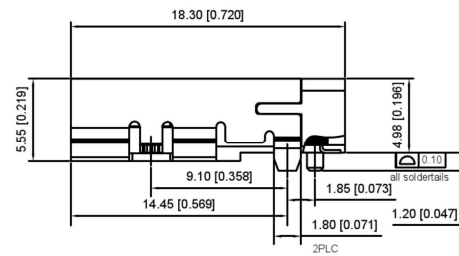
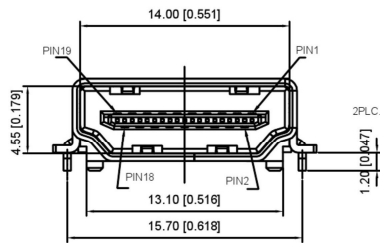





A71-05H7-1X1N1

1:AU 1U"
5:AU 15U"
6:AU 30U"

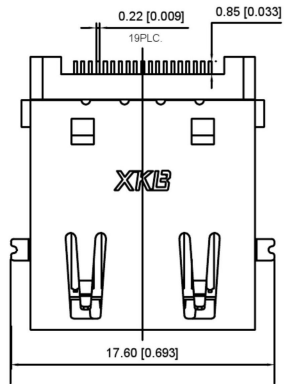

RECOMMENDED P.C.B LAYOUT (THICKNESS=1.2mm)

(COMPONENT SIDE) TOLERANCES ±0.05mm

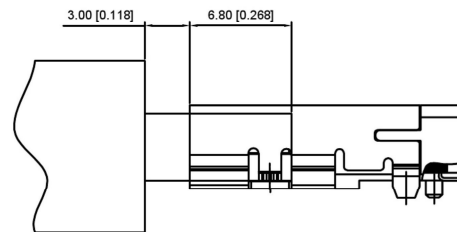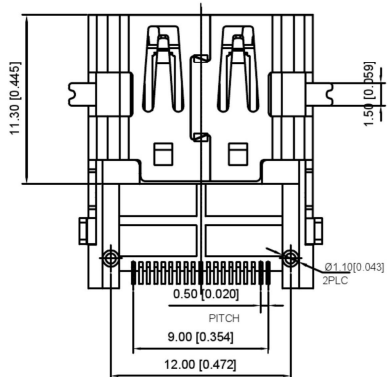

NOTE:

1. MATERIAL:

HOUSING: THERMOPLASTIC HIGH TEMP WITH 40% GF, UL94V-0.

CONTACT: BRASS T=0.20mm



SHELL: STAINLESS T=0.50mm

2. FINISH:

CONTACT: GOLD PLATING ON CONTACT AREA,
MATTE TIN PLATING ON SOLDER TAILS
100u" MIN. NICKEL UNDERPLATING OVERALL.

SHELL: 50-90u" NICKEL PLATING OVERALL.

3. MAJOR DIMENSION CRITICAL DIMENSION

				ANGLAR	±5°	 SWITCH CONNECTOR	DSND	SCALE: N/A	MODEL TYPE: HDMI CONNECTOR	
				L ≤ 4	±0.2		DWN	VIEW: 	PART NO.:	
				4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	DWG NO.:	
				16 < L ≤ 63	±0.4		APPD	SIZE: A4	A71-05H7-1X1N1	
				L > 63	±0.5				WEIGHT	SHEET
REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES			
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM		WWW.KSDKG.COM		KE SI DA ELECTRONIC TECHNOLOGY CO., LTD		
								1/1	A0	