



SECT B-B






U261-24XXN-4B0406

C TYPE PLUG:

PCB:

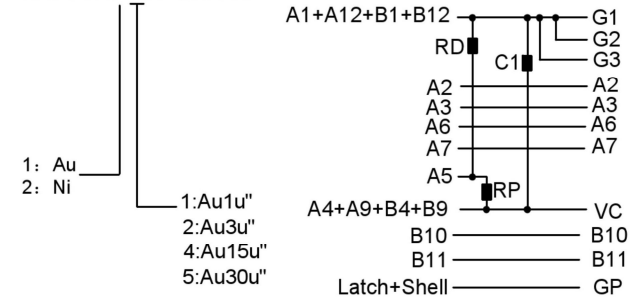

P/N	R/C
U261-24XXN-4B0406	C1(10nF)+RP 56KΩ

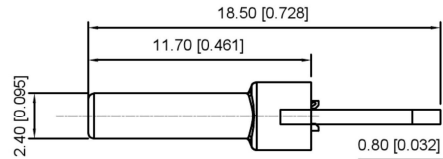

REMARKS:

1.CONTACT INSERTION AND WITHDRAW FORCE :



- 1.Insertion force : 5N-20N max.
2. Withdrawal force : 8N-20N.
- 3.Durability : 10000Cycles.

2.ELECTRIC PROPERTY :


- 1.Contact current rating : 3A.
- 2.Dielectric Strength : 100V AC(RMS).
- 3.Insulation Resistance : 100 megaohms min.
- 4.Contact resistance : 40m0hms MAX.FOR VBUS,GND AND OTHER CONTACT 50m0hms MAX.AFTER ENVIRONMENT TEST

3.AMBIENT TEMPERATURE :

- 1.Operating temperature : -55°C to +85°C.

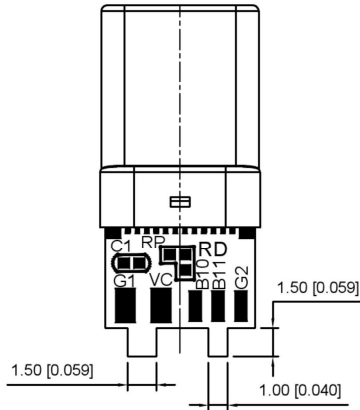

D
2:1

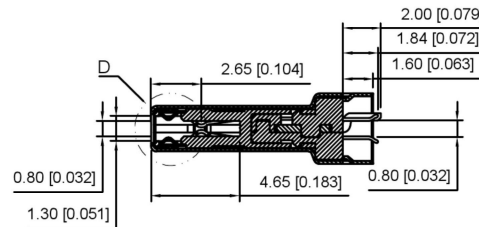

SECT A-A

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

ITEM	DESCRIPTION	MATERIAL	REMARKS
6	Shrapnel	SUS T=0.10mm	
5	Shell	SUS T=0.15mm	Ovep-plating : Ni
4	Terminal	C7025 T=0.15mm	Ovep-plating: Au Ni/Sn
3	Latch	SUS T=0.4mm	
2	Housing	LCP	UL94-0
1	Housing Stopper	LCP	UL94-0

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	Type-C 3.1
CHKD	UNIT: mm/in	PART NO.:
APPD	SIZE: A4	DWG NO.:
KE SI DA ELECTRONIC TECHNOLOGY CO., LTD		U261-24XXN-4B0406
WWW.BODONGKAIGUAN.NET	WWW.CKJACK.COM	WWW.KSDKG.COM
WEIGHT	SHEET	REVISION
	1/1	A0

