

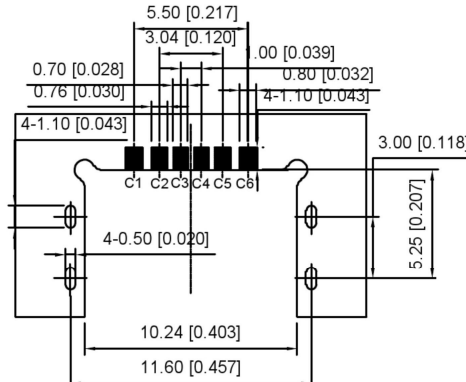


# U262-06XN-4BF711






1:0.8u"  
2:5u"  
3:10u"

W:WHITE  
B:BLACK  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

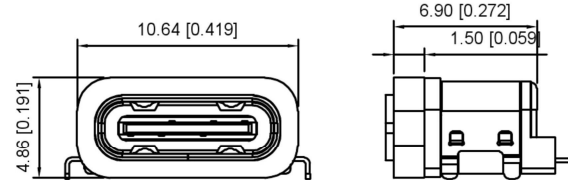


加防水圈示意图

RECOMMENDED P.C.B LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

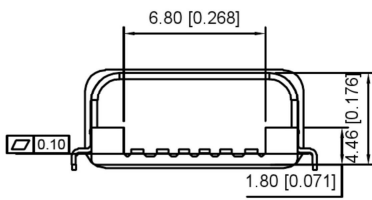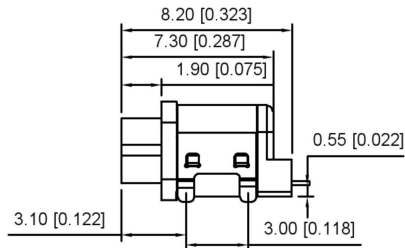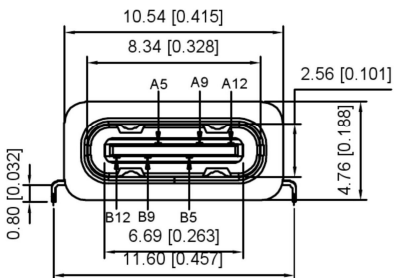

- NOTES:  
SPECIFICATION:  
1.CURRENT RATING: 3.0A MAX  
2.VOLTAGE: 100 VAC  
3. TEMPERATURE RANGE: -30℃~85℃  
4.CONTACT RESISTANCE: 40 MILLIONHM MAX  
5.INSULATION RESISTANCE: 100 MEGOHMS MIN  
6.INSERTION FORCE: 5N~20N  
7.UNMATING FORCE: 8N~20N  
8.DURABILITY: 10.000 CYCLES  
9.WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7

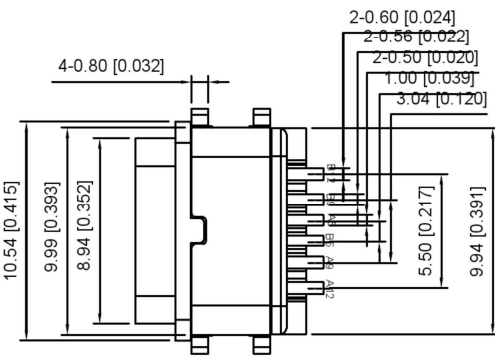

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	A5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: Type-C 3.1
			ANGULAR				±5°			
			L ≤ 4				±0.2			
			4 < L ≤ 16				±0.3			
			16 < L ≤ 63				±0.4			
			L > 63				±0.5			
								VIEW:		PART NO.:
								UNIT: mm/in		DWG NO.:
								SIZE: A4		U262-06XN-4BF711
								WEIGHT	SHEET	REVISION
									1/1	A0



KE SI DA ELECTRONIC TECHNOLOGY CO., LTD