
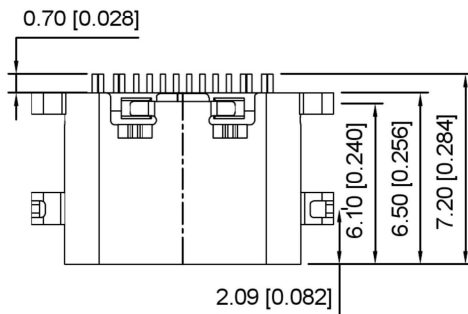
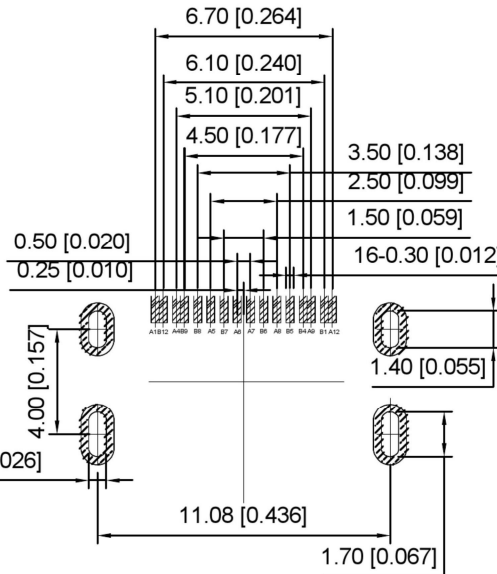


U262-16XN-4BC20865

- 1:WITH
 - 2:WITHOUT
 - W:WHITE
 - B:BLACK
- 1:Au1u"
 - 2:Au3u"
 - 4:Au15u"
 - 5:Au30u"
- 1:PBT
 - 2:PA6T
 - 3:PA9T
 - 4:LCP

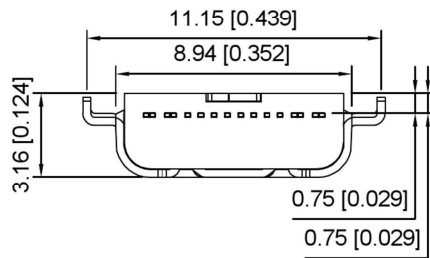

SPECIFICATION:

1. Material
 - Housing Material:High temperature thermoplastic
 - Contact Terminal:High Grade Copper Alloy
 - Metallic Shell:Stainless Steel
 - Inner Ground Cover Shell:Stainless Steel
 - Mid Plate:Stainless Steel
2. Mechanical:
 - 2.1.Mating force:5-20Nf;
 - 2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
 - 2.3.Durability:5000 Cycles;
- 3.Electrical:
 - 3.1.Current Rating:3A
 - 3.2.Voltage Rating:20V Max.;
 - 3.3.Dielectric Withstanding volage:100Vac,60S,10mA;
 - 3.4.Contact resistance:40m Ohms Max.;
 - 3.5.Insulation Resistance:100M Ohms Min.;
- 4.Environmental:
 - 4.1.Operating temperature:-40°C~+85°C;
 - 4.2.Salt Spray Test:24H Min.(No oxidation or rust);

				ANGLAR	±5°		DSND	SCALE: N/A	MODEL TYPE:	Type-C 3.1	
				L ≤ 4	±0.2		DWN	VIEW:	PART NO.:		
				4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4		APPD	SIZE: A4	U262-16XN-4BC20865		
				L > 63	±0.5					WEIGHT	SHEET
REVISIONS				UNSPECIFIED TOLERANCES		KE SI DA ELECTRONIC TECHNOLOGY CO., LTD				1/1	A0
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM		WWW.KSDKG.COM					