
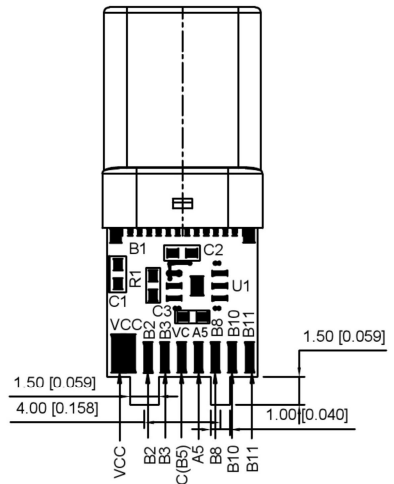
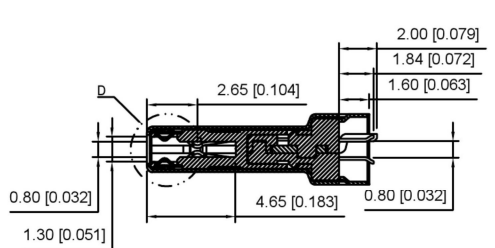


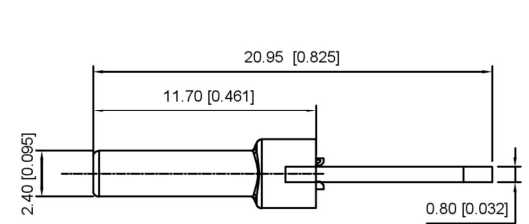



P/N	R/C
U261-24XXN-4B0389	C1. (10nF X5R 50V) C2. C3. (0.1uF X5R 6.3V) IC. HUSB331DN6(DFN-6L)
U261-24XXN-4B0390	C11(10nF X5R 50V) R1. (0R)

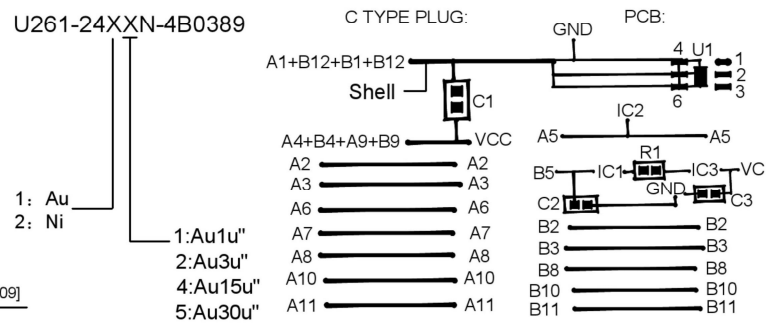

D  
2:1

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

- REMARKS:
- CONTACT INSERTION AND WITHDRAWAL FORCE :
    - Insertion force : 5N-20N max.
    - Withdrawal force : 8N-20N.
    - Durability : 10000Cycles.
  - ELECTRIC PROPERTY :
    - Contact current rating : 3A.
    - Dielectric Strength : 100V AC(RMS).
    - Insulation Resistance : 100 megohms min.
    - Contact resistance :
      - 40m0hms MAX.FOR VBUS,GND AND OTHER CONTACT
      - 50m0hms MAX.AFTER ENVIRONMENT TEST
  - AMBIENT TEMPERATURE :
    - Operating temperature : -55°C to +85°C.

ITEM	DESCRIPTION	MATERIAL	REMARKS
6	Shrapnel	SUS T=0.10mm	
5	Shell	SUS T=0.15mm	Ovep-plating : Ni
4	Terminal	C7025 T=0.15mm	Ovep-plating: Au Ni/Sn
3	Latch	SUS T=0.4mm	
2	Housing	LCP	UL94-0
1	Housing Stopper	LCP	UL94-0

REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: Type-C 3.1
							ANGULAR ±5°			
							L ≤ 4 ±0.2	DWN	VIEW:	PART NO.:
							4 < L ≤ 16 ±0.3	CHKD	UNIT: mm/in	DWG NO.:
							16 < L ≤ 63 ±0.4	APPD	SIZE: A4	U261-24XXN-4B0389
							L > 63 ±0.5			WEIGHT
WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM								KE SI DA ELECTRONIC TECHNOLOGY CO., LTD		SHEET 1/1
										REVISION A0

