


WITHOUT COVER








WITH COVER

- 1.Contact Resistance:40mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And unmating Force:  
Mating Force:5~20N  
Unmating Force:8~20N;  
6~20N AFTER TEST:
- 5.Durability:10000 Cycles;

### U263-24XN-4BQC16

Mating Area plating  
 01: Au 1u"Min.  
 03: Au 3u"Min.  
 05: Au 5u"Min.  
 10: Au 10u"Min.  
 15: Au 15u"Min.  
 30: Au 30u"Min.

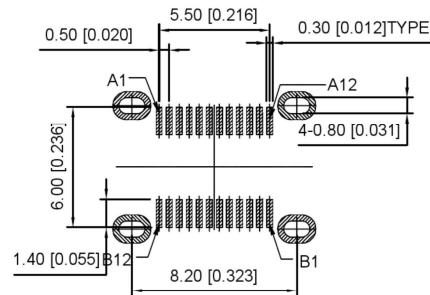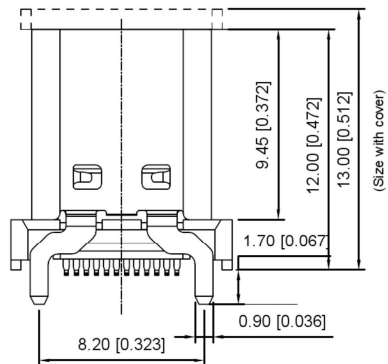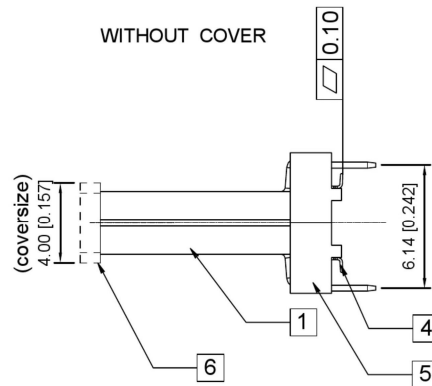

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05  
 KEEP OUT AREA

Item	Title	Material	Dispose	Q'TY
1	Shell	SUS304	Ni:30u" Min.	1PCS
2	GND Plate	SUS301		2PCS
3	Mid Plate	SUS301		1PCS
4	Contact	C7025	Mating Area: See P/N Solder Tails: Matt Tin	2PCS
5	Insert Molding	LCP E6808	UL 94V-0 Black	1PCS
6	COVER	LCP E6808	UL 94V-0 Black	1PCS

				ANGLAR	±5°	 <b>SWITCH CONNECTOR</b>	DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1	
				L ≤ 4	±0.2		DWN		VIEW:	PART NO.:	
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:	
				16 < L ≤ 63	±0.4		APPD		SIZE: A4	U263-24XN-4BQC16	
				L > 63	±0.5					WEIGHT	SHEET
REVISIONS				UNSPECIFIED TOLERANCES		KE SI DA ELECTRONIC TECHNOLOGY CO., LTD				1/1	A0
<a href="http://WWW.BODONGKAIGUAN.NET">WWW.BODONGKAIGUAN.NET</a> <a href="http://WWW.CKJACK.COM">WWW.CKJACK.COM</a> <a href="http://WWW.KSDKG.COM">WWW.KSDKG.COM</a>				DATE	REVISED	APPROVED					