


U262-16XN-4BSS73-T

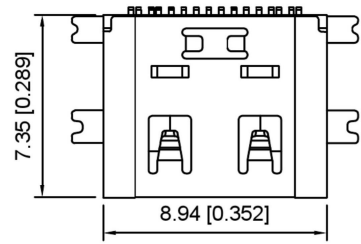

- 1.Au 1U"
- 2.Au 5U"
- 3.Au 10U"
- 6.Au 30U"
- 1.PBT
- 2.PA6T
- 3.PA9T
- 4.LCP
- W.WHITE
- B.BLACK





备注 NOTES:

1.材质 Material:

- 1.1胶芯 Plastic core: LCP+30%G.F
- 1.2端子 Terminal: C7025, T=0.15mm; Nickel base,gold plated
- 1.3外壳 shell: SUS, T=0.30mm; Nickel plated on the surface
- 1.4卡片 shell fragment: SUS, T=0.15mm;
- 2.电气特性 ELECTRICAL CHARACTERISTIC :
 - 2.1额定电流 Rated current: 3A
 - 2.2接触阻抗 Contact resistance: 40mΩ MAX
 - 2.3绝缘阻抗 Insulation resistance: 100MΩ MIN 250V DC
 - 2.4耐压 WITHSTANDING VOLTAGE: 100V AC
 - 2.5沾锡性: 温度245±5℃, 时间5±0.5s
 - 2.6插入力 INSERTION FORCE: 2.0kgf MAX
 - 拔出力 EXTRACTION FORCE:0.6kgf MIN
 - 2.7使用寿命 Service life: 5000次
 - 2.8工作温度 Operating temperature: -25℃~+80℃

PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

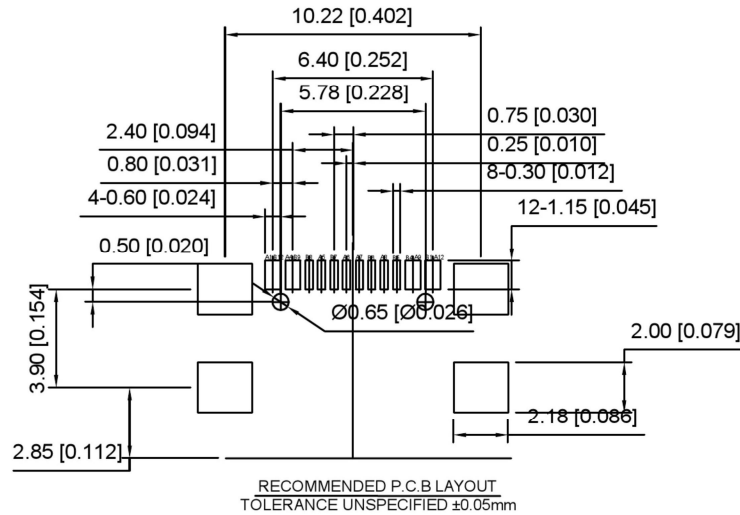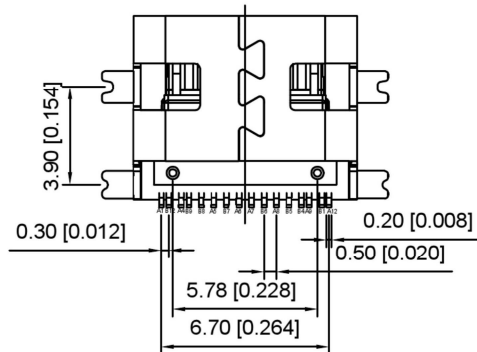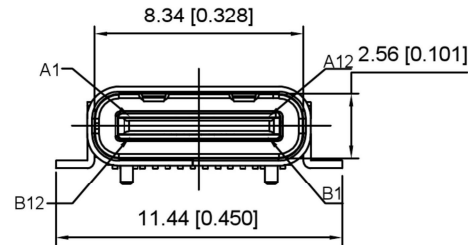

REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: Type-C 3.1	
			ANGULAR				±5°	DWN	VIEW:	PART NO.:	
			L ≤ 4				±0.2	CHKD	UNIT: mm/in	DWG NO.:	
			4 < L ≤ 16				±0.3	APPD	SIZE: A4	U262-16XN-4BSS73-T	
			16 < L ≤ 63				±0.4	KE SI DA ELECTRONIC TECHNOLOGY CO., LTD			
			L > 63				±0.5				WEIGHT
WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM								1/1			A0

