

U262-24XN-4BJ2105

- 1:WITH
- 2:WITHOUT
- W:WHITE
- B:BLACK
- 1: Au1u"
- 2: Au3u"
- 4: Au15u"
- 5: Au30u"
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

SPECIFICATION:

1. Material

- Housing Material: High temperature thermoplastic
- Contact Terminal: High Grade Copper Alloy
- Metallic Shell: Stainless Steel
- Inner Ground Cover Shell: Stainless Steel
- Mid Plate: Stainless Steel

2. Mechanical:







- 2.1. Mating force: 5-20Nf;
- 2.2. Unmating force: Initial: 8-20Nf; Final: 6-20Nf;
- 2.3. Durability: 10000 Cycles;

3. Electrical:

- 3.1. Current Rating: 3A
- 3.2. Voltage Rating: 20V Max.;
- 3.3. Dielectric Withstanding voltage: 100Vac, 60S, 10mA;
- 3.4. Contact resistance: 40m Ohms Max.;
- 3.5. Insulation Resistance: 100M Ohms Min.;

4. Environmental:

- 4.1. Operating temperature: -30°C ~ +80°C;
- 4.2. Salt Spray Test: 24H Min. (No oxidation or rust);

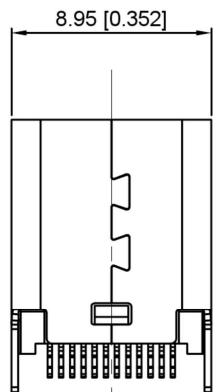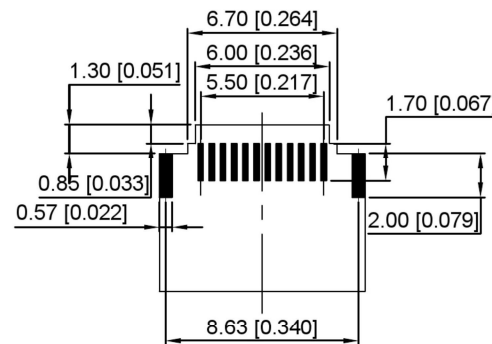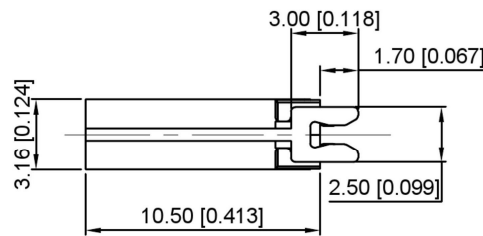

RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

				ANGLAR	±5°		DSND	SCALE: N/A	MODEL TYPE:	Type-C 3.1	
				L ≤ 4	±0.2		DWN	VIEW:	PART NO.:		
				4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	DWG NO.:	U262-24XN-4BJ2105	
				16 < L ≤ 63	±0.4		APPD	SIZE: A4	WEIGHT	SHEET	REVISION
				L > 63	±0.5		KE SI DA ELECTRONIC TECHNOLOGY CO., LTD			1/1	A0
REVISIONS				UNSPECIFIED TOLERANCES							
DATE				REVISED	APPROVED						
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM		WWW.KSDKG.COM					