
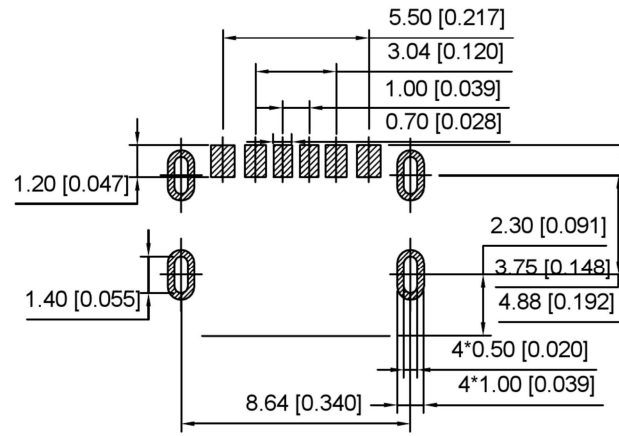







U262-06XN-4BVC10

1:0.8u"
2:5u"
3:10u"

Material
 Housing Material: LCP UL 94V-0
 Contact Terminal: High Grade Copper Alloy
 Metallic Shell: Stainless Steel
 Gnd Latch: Stainless Steel
 Plating
 Data Contact
 Underplating: 50µ" Min. Nickel
 Contact Plating: 1µ" Gold
 Solder Area: 80µ" Matte Tin
 Shell
 Metallic Shell: 50µ" Min. Nickel
 Cover Shell
 Metallic Shell: 80µ" Min. Nickel
 Inner Ground Cover Shell
 Metallic Shell: 50µ" Min. Nickel
Electrical
 Voltage Rating: 20V DC
 Current Rating: Vbus pins collectively 5.00A, GND pins collectively 0.25A, B5 pin 1.25A, Other pins 0.25A per pin.
 Contact Resistance: 40mΩ Max.
 Insulation resistance: 100 MΩ MIN.
 Dielectric withstanding voltage: 100V AC/Minute
Mechanical
 INSERTION: 5~20N.
 EXTRACTION: 8~20N AFTER TEST.
 TEMPERATURE RANGE -25 °C ~ +85 °C
 Durability: 8000 cycles

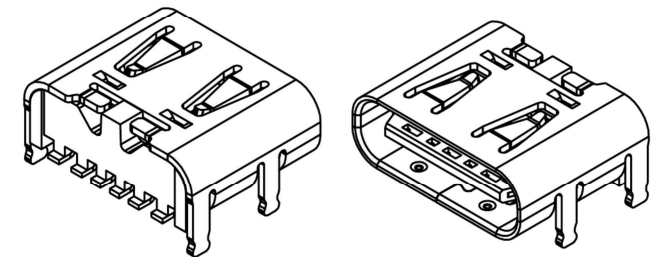

RECOMMENDED P.C.B LAYOUT
 TOLERANCE UNSPECIFIED ±0.05mm

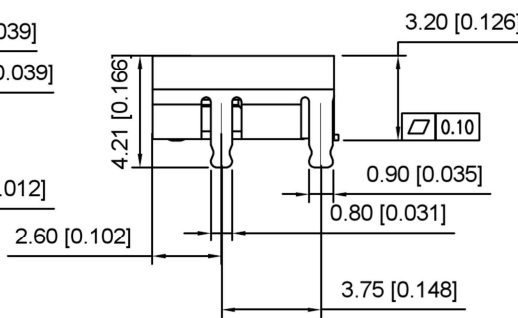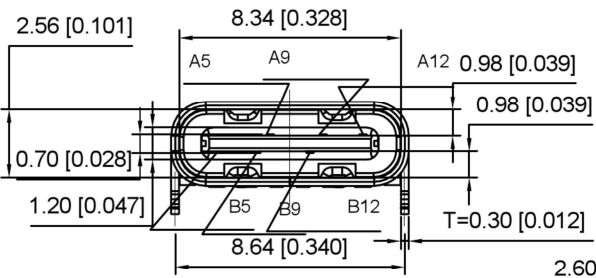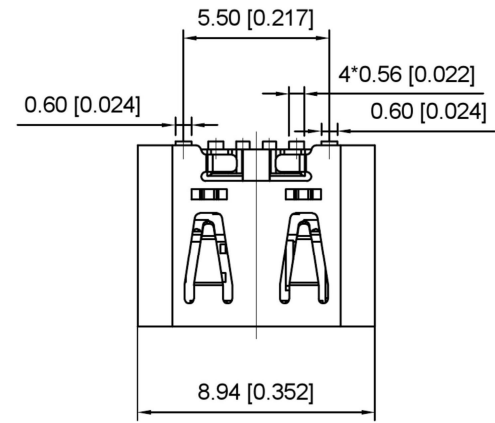

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

				ANGLAR	±5°	 SWITCH CONNECTOR	DSND		SCALE: N/A	MODEL TYPE:	Type-C 3.1	
				L ≤ 4	±0.2		DWN		VIEW:	PART NO.:		
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:	U262-06XN-4BVC10	
				16 < L ≤ 63	±0.4		APPD		SIZE: A4	WEIGHT	SHEET	REVISION
				L > 63	±0.5					1/1	A0	
REVISIONS				UNSPECIFIED TOLERANCES		KE SI DA ELECTRONIC TECHNOLOGY CO., LTD						
DATE				REVISED	APPROVED							
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM		WWW.KSDKG.COM						