

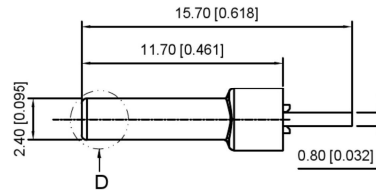

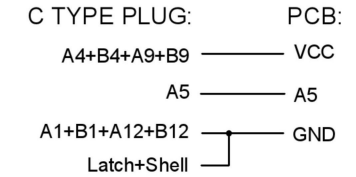


P/N	R/C
U261-12XXN-4B0084	



REMARKS:

1. CONTACT INSERTION AND WITHDRAW FORCE:




1. Insertion force: 5N-20N max.
2. Withdrawal force: 8N-20N.
3. Durability: 10000Cycles.

2. ELECTRIC PROPERTY:

1. Contact current rating: 3A.
2. Dielectric Strength: 100V AC(RMS).
3. Insulation Resistance: 100 megaohms min.
4. Contact resistance: 40mOhms MAX. FOR VBUS, GND AND OTHER CONTACT 50mOhms MAX. AFTER ENVIRONMENT TEST

3. AMBIENT TEMPERATURE:

1. Operating temperature: -55°C to +85°C.

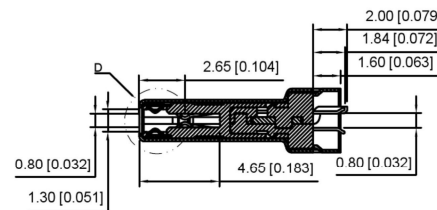

6	Shrapnel	SUS T=0.10mm	
5	Shell	SUS T=0.15mm	Ovep-plating: Ni
4	Terminal	C5191 T=0.15mm	Ovep-plating: Au Ni/Sn
3	Latch	SUS T=0.4mm	
2	Housing	LCP	UL94-0
1	Housing Stopper	LCP	UL94-0
ITEM	DESCRIPTION	MATERIAL	REMARKS

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

				ANGULAR	±5°		DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1		
				L ≤ 4	±0.2		DWN		VIEW:	PART NO.:		
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4		APPD		SIZE: A4	U261-12XXN-4B0084U		
REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES			WEIGHT	SHEET	REVISION
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM		WWW.KSDKG.COM		KE SI DA ELECTRONIC TECHNOLOGY CO., LTD			1/1	A0