




Feature :

Compact size
Reflow soldering available
LED illuminated

Application :


Consumer products
Computer products
Instrumentation
Communication equipments
Hand-held devices

SWITCH SPECIFICATIONS	
POLE - POSITION	2P2T , SMT TYPE
CONTACT RATING	6 V DC , 0.3 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown Is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	200 ± 150gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	2.0 ± 0.2 mm

LED SPECIFICATIONS							
 ATTENTION LEDs are Electrostatic Sensitive devices 	Unit	Value / LED Color					
		Blue	Pure Green	Red	Yellow	Orange	Green
LUMINOUS INTENSITY@20mA I _v	mcd	100	413	230	150	250	50
Dominant Wavelength λ _D	nm	470	525	630	590	601	568
FORWARD VOLTAGE@20mA V _f	V	3.3	3.3	1.95	2	2.1	2.1




■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

HOW TO ORDER

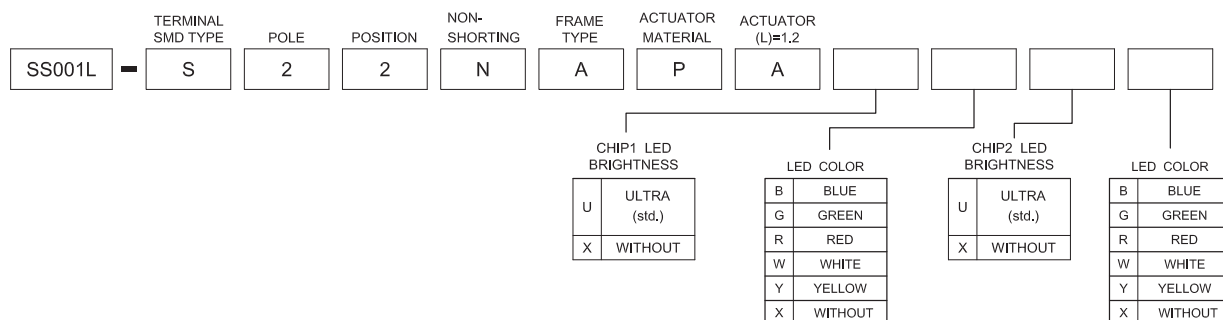

DIMENSION

SS001L-S22NAPA □ □

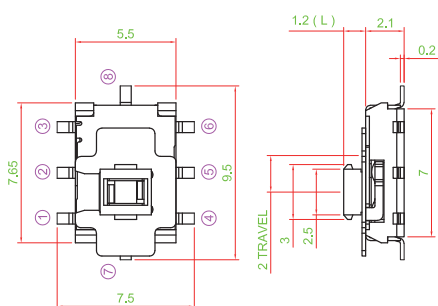

CIRCUIT

