


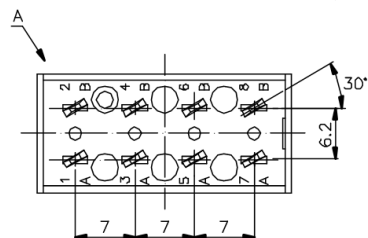



KSD

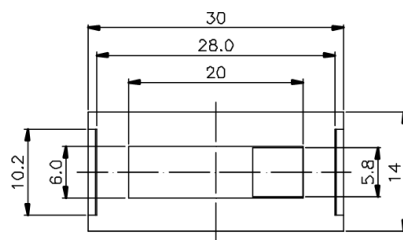

NON-SHORTING
SCHEMATIC



A DETAIL
4 : 1

MARKING: U16SS **KSD** 
10(1)A 250V~T85 μ

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P3T
	RATING: AC 125V 16A AC 250V 8A	MODEL NO: U16SS-23N01-G(B)
	CONTACT RESISTANCE: Not more than 30m Ω	UNIT: m m DWN
	INSULATION RESISTANCE: 500M Ω at 500V DC	SCALE: 2 : 1 CHK'D
	WITHSTAND VOLTAGE: AC 1000V for 1 min	TOLERANCE: ± 0.20 APPD.
	OPERATION FORCE: 600 ± 200 g	
	SWITCHING LIFE: 10000 Cycles (6-10c/m loading)	
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:
DATE:		