
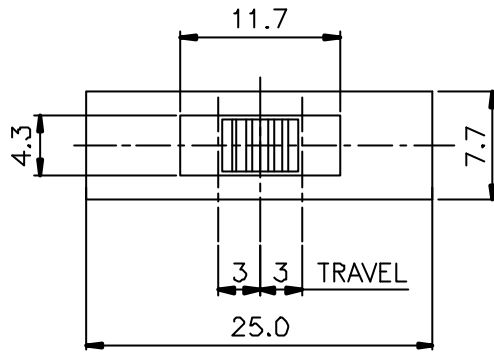
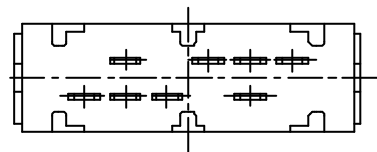
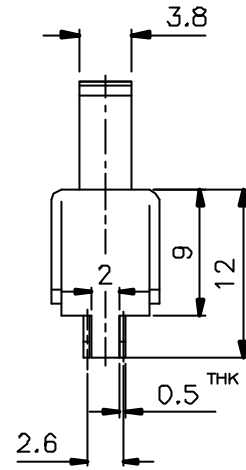


SCHEMATIC

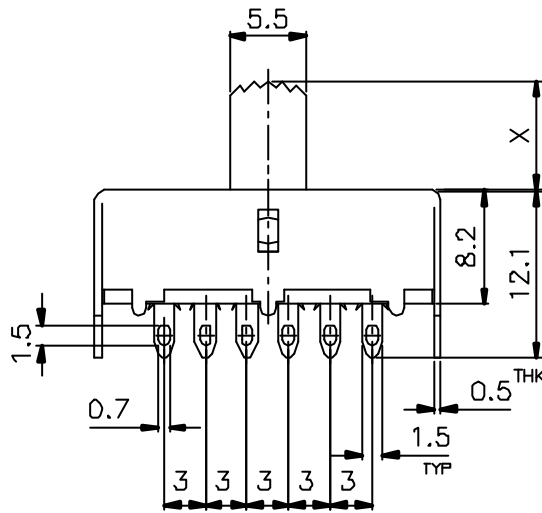

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P3T			
	RATING: DC 50V 0.5A	MODEL NO: SS-23F08-G			
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: mm	DWN		
	INSULATION RESISTANCE: 500M Ω at 500V DC	SCALE: 2 : 1	CHK'D		
	WITHSTAND VOLTAGE: AC 500V for 1 min	TOLERANCE: ±0.2	APPD.		
	OPERATION FORCE: 450±300g				
	SWITCHING LIFE: 10000 Cycles (6-10c/m loading)				
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.				DRWG NO:
DATE:					B 801027-01