
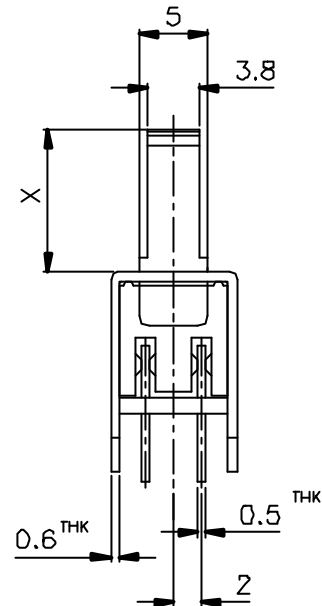
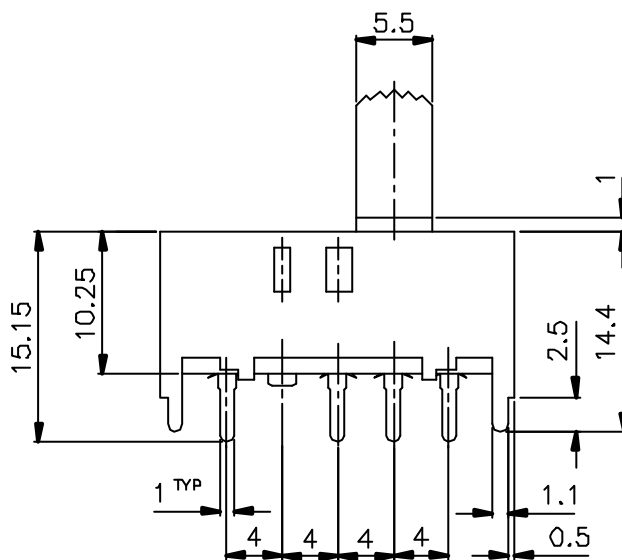


SCHEMATIC

NON-SHORTING

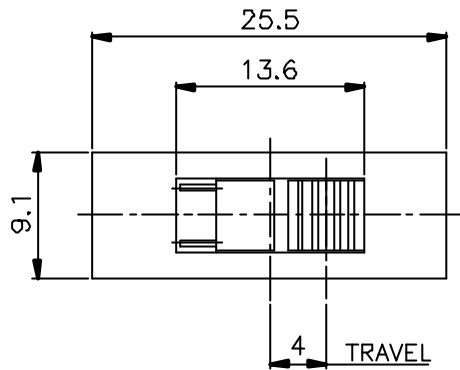

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P3T				
	RATING: DC 50V 0.5A	MODEL NO: SS-23H24-G				
	CONTACT RESISTANCE: Not more than 30mΩ					
	INSULATION RESISTANCE: 500M at 500V DC	UNIT: mm	DWN			
	WITHSTAND VOLTAGE: AC 500V for 1 min	SCALE: 2 : 1	CHK'D			
	OPERATION FORCE: 400±300g	TOLERANCE: ±0.20	APPD.			
	SWITCHING LIFE: 10K cycles(6-10c/m loading)					
BY:	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.				DRWG NO:	
DATE:					880154-00	