
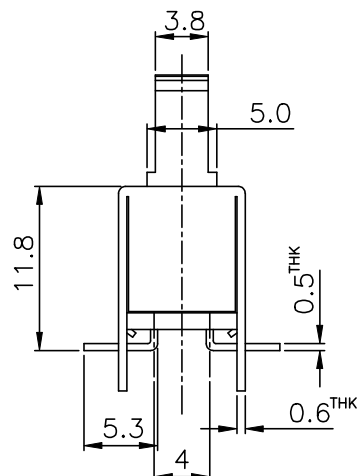
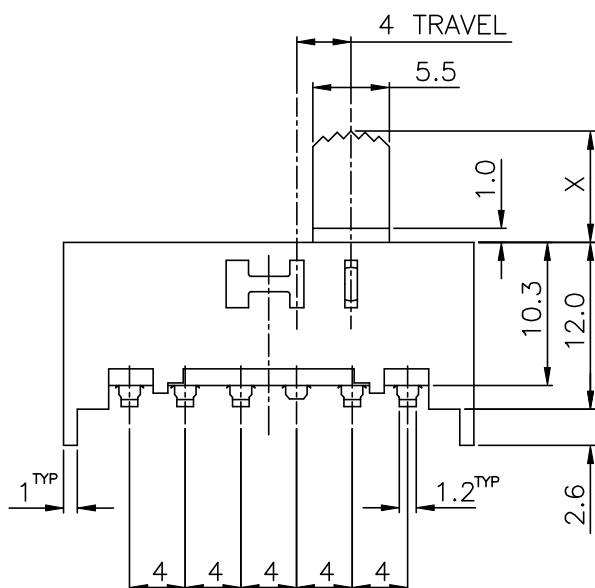



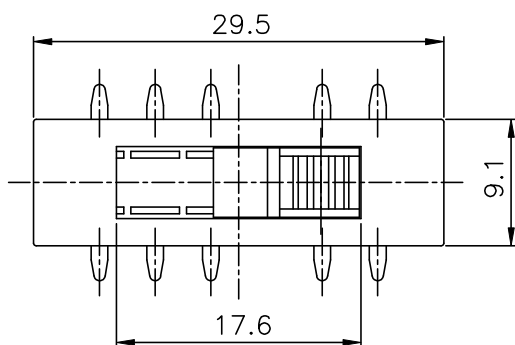

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P4T					
	RATING: DC 50V 0.5A	MODEL NO: SS-24H10-G					
	CONTACT RESISTANCE: MAX. 30mΩ						
	INSULATION RESISTANCE: 500MΩ AT 500V DC	UNIT: m m	DWN	LIU	11.12.09		
	WITHSTAND VOLTAGE: AC 500V FOR 1 MIN	SCALE: 2 : 1	CHK'D				
	OPERATION FORCE: 300± 100g	TOLERANCE: ±0.2	APPD.				
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)						
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.				DRWG NO: A90676-00		REV: A
DATE:							