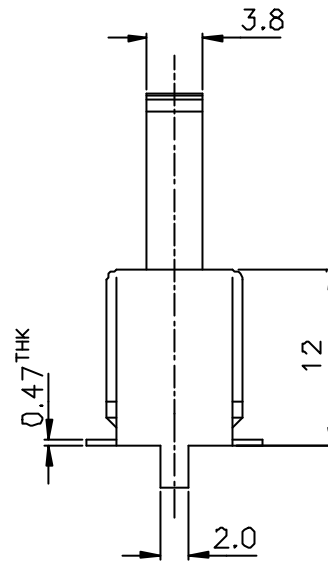
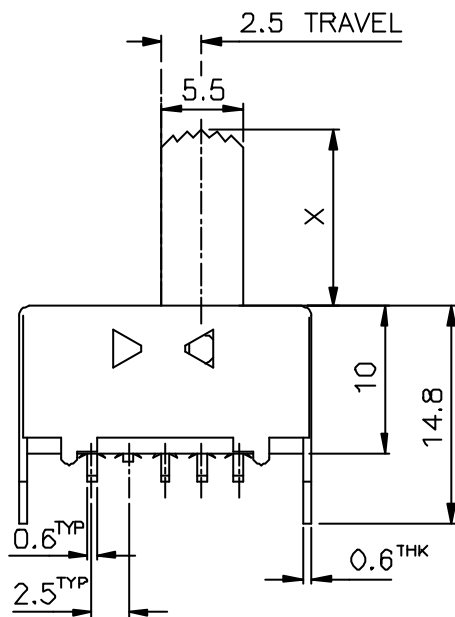
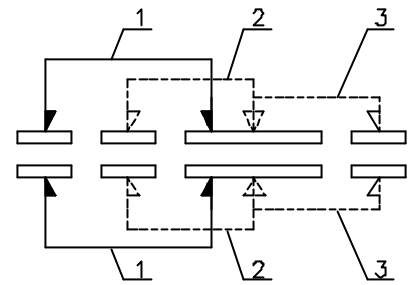
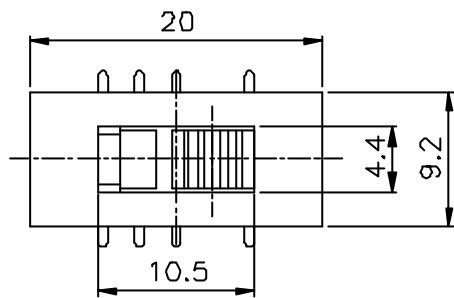


X =

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P3T					
	RATING: DC 50V 0.5A	MODEL NO: SS-23E02-G					
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: m m	DWN	XZK	11.09.09		
	INSULATION RESISTANCE 500MΩ at 500V DC						
	WITHSTAND VOLTAGE: AC 500V for 1 min	SCALE: 2 : 1		CHK'D			
	OPERATION FORCE: 350 ± 200g	TOLERANCE ±0.2		APPD.			
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)						
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.				DRWG NO: A90444-00		REV: A