
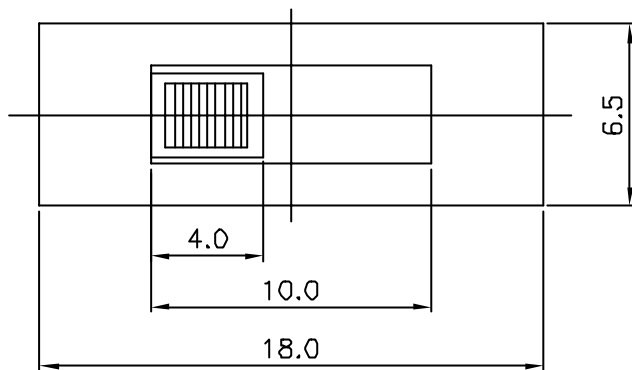
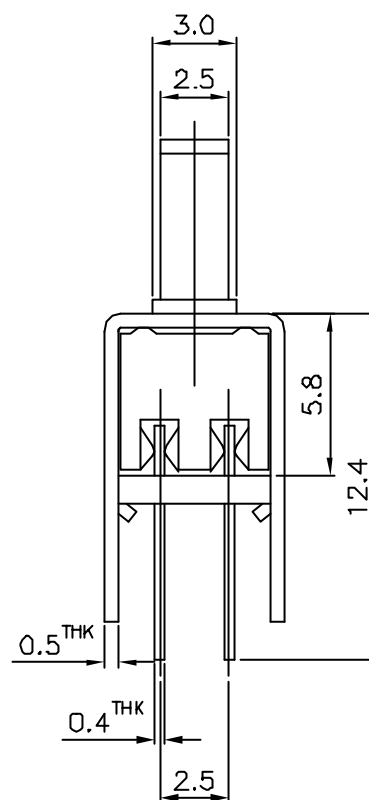


SCHEMATIC

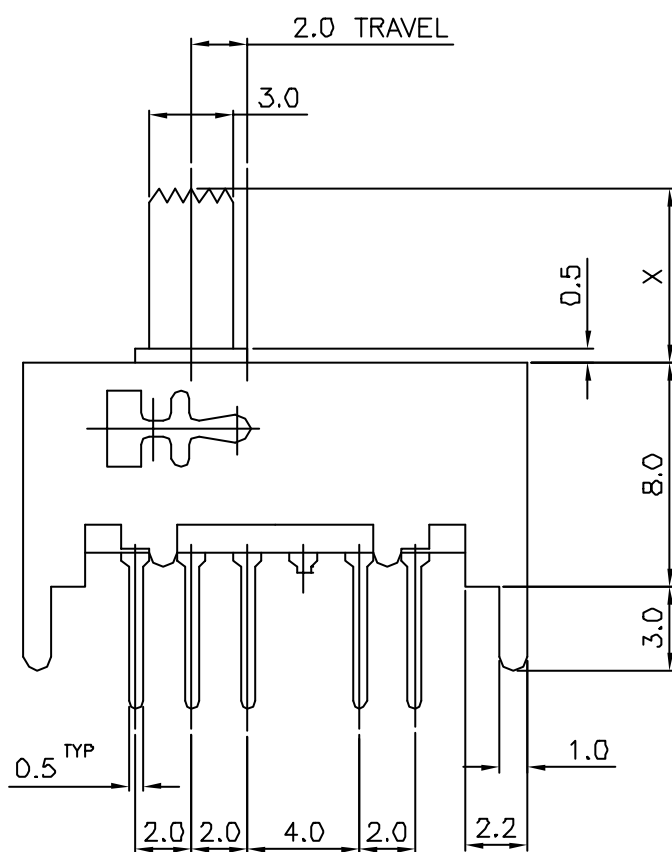

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P4T				
	RATING: DC 50V 0.5A	MODEL NO: SS-24D06-G(A)				
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: m m	DWN	Chengongge	29.05.06	
	INSULATION RESISTANCE: 500MΩ at 500V DC					
	WITHSTAND VOLTAGE: AC 500V for 1 min	SCALE: 4 : 1	CHK'D			
	OPERATION FORCE: 400±250 g					
	SWITCHING LIFE: 10000 cycles(6-10c/m loading)	TOLERANCE: ±0.2		APPD.		
BY:	 广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.				DRWG NO:	
DATE:					A60304-00	